

MBA

2020

Hammer Drive Pins


Flat Head Zinc Plated or Round Head 304 Grade Stainless Steel



Hammer drive pins are a self-coloured cold formed pin made from low carbon steel or 304 grade stainless steel. Used to replace screws where the need to remove the pin is unlikely. They are designed for use in mild steel, aluminium, brass or plastics. The hole should be drilled between the recommended minimum and maximum hole diameters shown in the selection tables. They are good for quantity production runs where a quick permanent join is required.

To find and order parts online, simply enter the part number from this catalogue into the search box on any web page.

Part Number Designations



1 HDP: Designates Hammer Drive Pin

4 Head Style:

F: Flat Head
R: Round Head

2 Nominal Hole Size Code:

Nominal Hole Size in mm using 3 digits with no decimal point

ie: 014 = 1.4mm

5 Material:

Blank: Low Carbon Steel
S4: Stainless Steel Grade 304


3 Nominal Length Code:

Nominal Length in mm using 2 digits

ie: 05 = Approx 5mm long, 10 = approx 10mm long

Diagram of round head type

Flat head type uses the same basic size reference points

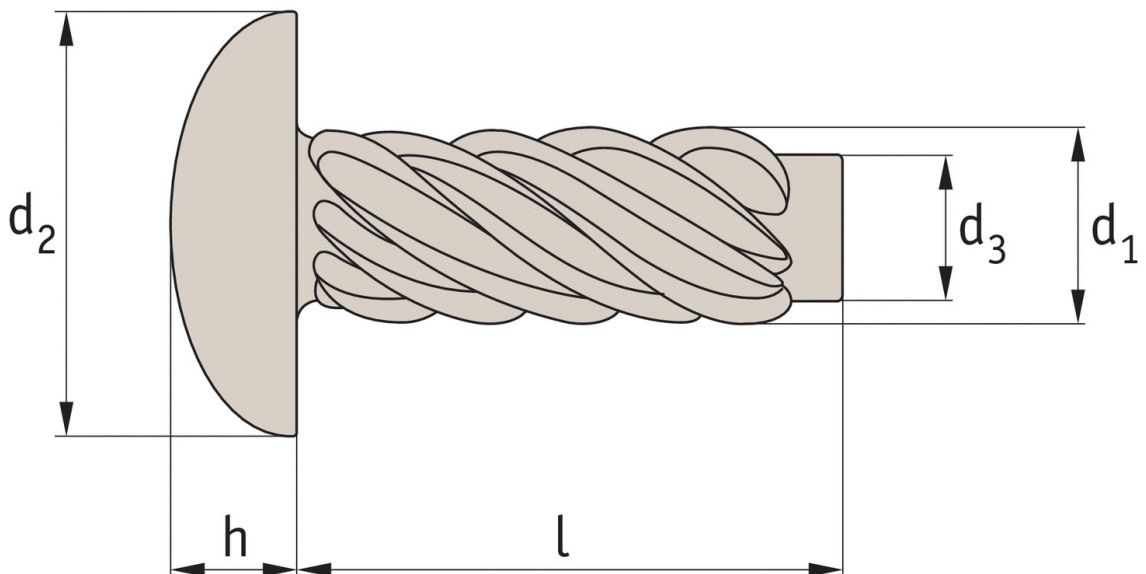

Approx. Length mm (in.)	Max Hole Dia. mm (in.)	Type	Part Number
Min Hole Dia. mm (in.): 1.24 (0.05")			
3.2 (0.13")	1.32 (0.05")	Round Head Stainless Steel	HDP012-03R-S4
Approx Pin Diameter (d1): 1.52, Max Head Diameter (d2): 2.51, Max Head Thickness (h): 0.86			
4.8 (0.19")	1.32 (0.05")	Round Head Stainless Steel	HDP012-05R-S4
Approx Pin Diameter (d1): 1.52, Max Head Diameter (d2): 2.51, Max Head Thickness (h): 0.86			
Min Hole Dia mm (in.): 1.40 (0.06")			
5.0 (0.20")	1.46 (0.06")	Flat Head Zinc Plated	HDP014-05F
Approx Pin Diameter (d2): 1.63, Max Head Diameter (d3): 2.60, Max Head Thickness (T): 0.55			
6.0 (0.24")	1.46 (0.06")	Flat Head Zinc Plated	HDP014-06F
Approx Pin Diameter (d2): 1.63, Max Head Diameter (d3): 2.60, Max Head Thickness (T): 0.55			
8.0 (0.31")	1.46 (0.06")	Flat Head Zinc Plated	HDP014-08F
Approx Pin Diameter (d2): 1.63, Max Head Diameter (d3): 2.60, Max Head Thickness (T): 0.55			
Min Hole Dia. mm (in.): 1.52 (0.06")			
6.3 (0.25")	1.60 (0.06")	Round Head Stainless Steel	HDP015-06R-S4
Approx Pin Diameter (d1): 1.70, Max Head Diameter (d2): 2.51, Max Head Thickness (h): 0.86			
9.5 (0.37")	1.60 (0.06")	Round Head Stainless Steel	HDP015-09R-S4
Approx Pin Diameter (d1): 1.70, Max Head Diameter (d2): 2.51, Max Head Thickness (h): 0.86			
Min Hole Dia mm (in.): 1.60 (0.06")			
5.0 (0.20")	1.66 (0.07")	Flat Head Zinc Plated	HDP016-05F
Approx Pin Diameter (d2): 1.83, Max Head Diameter (d3): 3.00, Max Head Thickness (T): 0.65			
6.0 (0.24")	1.66 (0.07")	Flat Head Zinc Plated	HDP016-06F
Approx Pin Diameter (d2): 1.83, Max Head Diameter (d3): 3.00, Max Head Thickness (T): 0.65			
8.0 (0.31")	1.66 (0.07")	Flat Head Zinc Plated	HDP016-08F
Approx Pin Diameter (d2): 1.83, Max Head Diameter (d3): 3.00, Max Head Thickness (T): 0.65			
Min Hole Dia mm (in.): 2.00 (0.08")			
6.0 (0.24")	2.06 (0.08")	Flat Head Zinc Plated	HDP020-06F
Approx Pin Diameter (d2): 2.30, Max Head Diameter (d3): 3.70, Max Head Thickness (T): 0.75			
8.0 (0.31")	2.06 (0.08")	Flat Head Zinc Plated	HDP020-08F
Approx Pin Diameter (d2): 2.30, Max Head Diameter (d3): 3.70, Max Head Thickness (T): 0.75			
10.0 (0.39")	2.06 (0.08")	Flat Head Zinc Plated	HDP020-10F
Approx Pin Diameter (d2): 2.30, Max Head Diameter (d3): 3.70, Max Head Thickness (T): 0.75			
Min Hole Dia. mm (in.): 2.10 (0.08")			
3.2 (0.13")	2.18 (0.09")	Round Head Stainless Steel	HDP021-03R-S4
Approx Pin Diameter (d1): 2.54, Max Head Diameter (d2): 4.10, Max Head Thickness (h): 1.75			
4.8 (0.19")	2.18 (0.09")	Round Head Stainless Steel	HDP021-05R-S4
Approx Pin Diameter (d1): 2.54, Max Head Diameter (d2): 4.10, Max Head Thickness (h): 1.75			
6.3 (0.25")	2.18 (0.09")	Round Head Stainless Steel	HDP021-06R-S4
Approx Pin Diameter (d1): 2.54, Max Head Diameter (d2): 4.10, Max Head Thickness (h): 1.75			
7.9 (0.31")	2.18 (0.09")	Round Head Stainless Steel	* HDP021-08R-S4
Approx Pin Diameter (d1): 2.54, Max Head Diameter (d2): 4.10, Max Head Thickness (h): 1.75			
Min Hole Dia. mm (in.): 2.44 (0.10")			
4.8 (0.19")	2.64 (0.10")	Round Head Stainless Steel	HDP024-05R-S4
Approx Pin Diameter (d1): 2.95, Max Head Diameter (d2): 5.36, Max Head Thickness (h): 2.18			
6.3 (0.25")	2.64 (0.10")	Round Head Stainless Steel	HDP024-06R-S4
Approx Pin Diameter (d1): 2.95, Max Head Diameter (d2): 5.36, Max Head Thickness (h): 2.18			
7.9 (0.31")	2.64 (0.10")	Round Head Stainless Steel	HDP024-08R-S4
Approx Pin Diameter (d1): 2.95, Max Head Diameter (d2): 5.36, Max Head Thickness (h): 2.18			
9.5 (0.37")	2.64 (0.10")	Round Head Stainless Steel	HDP024-09R-S4
Approx Pin Diameter (d1): 2.95, Max Head Diameter (d2): 5.36, Max Head Thickness (h): 2.18			
Min Hole Dia mm (in.): 2.50 (0.10")			
6.0 (0.24")	2.56 (0.10")	Flat Head Zinc Plated	HDP025-06F
Approx Pin Diameter (d2): 2.80, Max Head Diameter (d3): 4.60, Max Head Thickness (T): 0.90			
8.0 (0.31")	2.56 (0.10")	Flat Head Zinc Plated	HDP025-08F
Approx Pin Diameter (d2): 2.80, Max Head Diameter (d3): 4.60, Max Head Thickness (T): 0.90			
10.0 (0.39")	2.56 (0.10")	Flat Head Zinc Plated	HDP025-10F
Approx Pin Diameter (d2): 2.80, Max Head Diameter (d3): 4.60, Max Head Thickness (T): 0.90			
Min Hole Dia. mm (in.): 2.95 (0.12")			
6.3 (0.25")	3.05 (0.12")	Round Head Stainless Steel	HDP029-06R-S4
Approx Pin Diameter (d1): 3.56, Max Head Diameter (d2): 6.60, Max Head Thickness (h): 2.62			



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Approx. Length mm (in.)	Max Hole Dia. mm (in.)	Type	Part Number
7.9 (0.31")	3.05 (0.12")	Round Head Stainless Steel Approx Pin Diameter (d1): 3.56, Max Head Diameter (d2): 6.60, Max Head Thickness (h): 2.62	HDP029-08R-S4
9.5 (0.37")	3.05 (0.12")	Round Head Stainless Steel Approx Pin Diameter (d1): 3.56, Max Head Diameter (d2): 6.60, Max Head Thickness (h): 2.62	HDP029-09R-S4
12.7 (0.50")	3.05 (0.12")	Round Head Stainless Steel Approx Pin Diameter (d1): 3.56, Max Head Diameter (d2): 6.60, Max Head Thickness (h): 2.62	HDP029-13R-S4
Min Hole Dia mm (in.): 3.00 (0.12")			
8.0 (0.31")	3.06 (0.12")	Flat Head Zinc Plated Approx Pin Diameter (d2): 3.35, Max Head Diameter (d3): 5.45, Max Head Thickness (T): 1.20	HDP030-08F
10.0 (0.39")	3.06 (0.12")	Flat Head Zinc Plated Approx Pin Diameter (d2): 3.35, Max Head Diameter (d3): 5.45, Max Head Thickness (T): 1.20	HDP030-10F
12.0 (0.47")	3.06 (0.12")	Flat Head Zinc Plated Approx Pin Diameter (d2): 3.35, Max Head Diameter (d3): 5.45, Max Head Thickness (T): 1.20	HDP030-12F
Min Hole Dia. mm (in.): 3.45 (0.14")			
9.5 (0.37")	3.65 (0.14")	Round Head Stainless Steel Approx Pin Diameter (d1): 4.24, Max Head Diameter (d2): 7.85, Max Head Thickness (h): 3.05	HDP034-09R-S4
12.7 (0.50")	3.65 (0.14")	Round Head Stainless Steel Approx Pin Diameter (d1): 4.24, Max Head Diameter (d2): 7.85, Max Head Thickness (h): 3.05	HDP034-13R-S4
Min Hole Dia. mm (in.): 3.80 (0.15")			
9.5 (0.37")	4.09 (0.16")	Round Head Stainless Steel Approx Pin Diameter (d1): 4.62, Max Head Diameter (d2): 9.11, Max Head Thickness (h): 3.48	HDP038-09R-S4
12.7 (0.50")	4.09 (0.16")	Round Head Stainless Steel Approx Pin Diameter (d1): 4.62, Max Head Diameter (d2): 9.11, Max Head Thickness (h): 3.48	HDP038-13R-S4
Min Hole Dia mm (in.): 4.00 (0.16")			
10.0 (0.39")	4.08 (0.16")	Flat Head Zinc Plated Approx Pin Diameter (d2): 4.35, Max Head Diameter (d3): 7.25, Max Head Thickness (T): 1.50	HDP040-10F
12.0 (0.47")	4.08 (0.16")	Flat Head Zinc Plated Approx Pin Diameter (d2): 4.35, Max Head Diameter (d3): 7.25, Max Head Thickness (T): 1.50	HDP040-12F
16.0 (0.63")	4.08 (0.16")	Flat Head Zinc Plated Approx Pin Diameter (d2): 4.35, Max Head Diameter (d3): 7.25, Max Head Thickness (T): 1.50	HDP040-16F
Min Hole Dia mm (in.): 5.00 (0.20")			
12.0 (0.47")	5.08 (0.20")	Flat Head Zinc Plated Approx Pin Diameter (d2): 5.35, Max Head Diameter (d3): 9.10, Max Head Thickness (T): 1.80	HDP050-12F
16.0 (0.63")	5.08 (0.20")	Flat Head Zinc Plated Approx Pin Diameter (d2): 5.35, Max Head Diameter (d3): 9.10, Max Head Thickness (T): 1.80	HDP050-16F
20.0 (0.79")	5.08 (0.20")	Flat Head Zinc Plated Approx Pin Diameter (d2): 5.35, Max Head Diameter (d3): 9.10, Max Head Thickness (T): 1.80	HDP050-20F
Min Hole Dia mm (in.): 6.00 (0.24")			
16.0 (0.63")	6.08 (0.24")	Flat Head Zinc Plated Approx Pin Diameter (d2): 6.35, Max Head Diameter (d3): 10.80, Max Head Thickness (T): 2.20	HDP060-16F
20.0 (0.79")	6.08 (0.24")	Flat Head Zinc Plated Approx Pin Diameter (d2): 6.35, Max Head Diameter (d3): 10.80, Max Head Thickness (T): 2.20	HDP060-20F



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

NOTES



Distributed By

Miniature Bearings Australia
<http://www.minibearings.com.au>
sales@minibearings.com.au

Resellers: Please place your contact sticker over our details

Avoid verbal communication

We sell an extensive range of products with varying amounts of technical data. Please assist us to provide you with accurate information by placing your orders and enquiries online or by e-mail.

Hammer Drive Pins