

# MBA

# 2020

## Thumbs Screws & Nuts



### INDEX

Thumb Nuts	3-4
Thumb Screws	5-21
Captive Thumb Screws	22-25

This listing is intended as a quick guide to the sizes and styles available.


For more details on any item please enter the part number into the search box on our website

To find and order parts online, simply enter the part number from this catalogue into the search box on any web page.

Thumb Nuts



Thumb Screws  
Standard Example

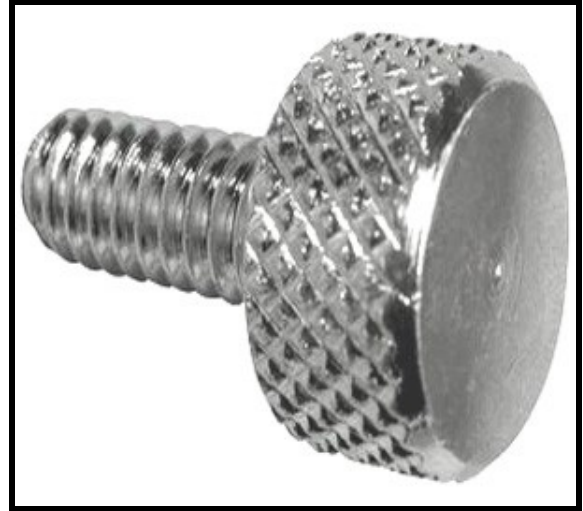

Captive Thumbs Screws



# Thumb Nuts

Overall Length (C) mm (in.)	Head Width (B) mm (in.)	Head Diameter (A) mm (in.)	Shoulder Diameter mm	Material	Part Number
<b>2-56 UNC (2.184mm) Thread Size</b>					
6.40 (0.25")	3.18 (0.13")	6.35		Stainless Steel	<b>NT022C-THC-S3</b> <i>Nuts - Thumb - Collared - Stainless</i>
<b>4-40 UNC (2.845mm) Thread Size</b>					
6.40 (0.25")	3.18 (0.13")	7.94		Stainless Steel	<b>NT028C-THC-S3</b> <i>Nuts - Thumb - Collared - Stainless</i>
9.50 (0.37")	3.18 (0.13")	12.70	6.35 (0.25")	Stainless Steel	<b>NT028C-TH1206-S3</b> <i>Nuts - Thumb - Basic</i>
<b>M3x0.5 (3mm Standard) Thread Size</b>					
7.50 (0.30")	2.50 (0.10")	12.00	6.00 (0.24")	303 Stainless Steel	* NT030M-TH1205-S3 <i>Nuts - Thumb - Basic</i>
<b>6-32 UNC (3.5mm) Thread Size</b>					
7.10 (0.28")	3.18 (0.13")	9.53		Brass	<b>NT035C-THC-BR</b> <i>Nuts - Thumb - Collared - Brass</i>
7.10 (0.28")	3.18 (0.13")	9.53		Stainless Steel	<b>NT035C-THC-S3</b> <i>Nuts - Thumb - Collared - Stainless</i>
9.50 (0.37")	3.18 (0.13")	12.70	6.35 (0.25")	Stainless Steel	<b>NT035C-TH1206-S3</b> <i>Nuts - Thumb - Basic</i>
15.90 (0.63")	3.18 (0.13")	19.05	6.35 (0.25")	Stainless Steel	<b>NT035C-TH1912-S3</b> <i>Nuts - Thumb - Basic</i>
<b>M4x0.7 (4mm Standard) Thread Size</b>					
12.50 (0.49")	6.54 (0.26")	16.00	8.00 (0.31")	303 Stainless Steel	* NT040M-TH1606-S3 <i>Nuts - Thumb - Basic</i>
<b>8-32 UNC (4.166mm) Thread Size</b>					
7.10 (0.28")	3.18 (0.13")	11.11		Brass	<b>NT042C-THC-BR</b> <i>Nuts - Thumb - Collared - Brass</i>
7.10 (0.28")	3.18 (0.13")	11.11		Stainless Steel	<b>NT042C-THC-S3</b> <i>Nuts - Thumb - Collared - Stainless</i>
9.50 (0.37")	3.18 (0.13")	12.70	7.94 (0.31")	Stainless Steel	<b>NT042C-TH1206-S3</b> <i>Nuts - Thumb - Basic</i>
9.50 (0.37")	3.18 (0.13")	19.05	7.94 (0.31")	Stainless Steel	<b>NT042C-TH1906-S3</b> <i>Nuts - Thumb - Basic</i>
15.90 (0.63")	3.18 (0.13")	19.05	7.94 (0.31")	Stainless Steel	<b>NT042C-TH1912-S3</b> <i>Nuts - Thumb - Basic</i>
<b>10-24 UNC (4.762mm) Thread Size</b>					
8.70 (0.34")	3.97 (0.16")	12.70		Brass	<b>NT048C-THC-BR</b> <i>Nuts - Thumb - Collared - Brass</i>
8.70 (0.34")	3.97 (0.16")	12.70		Stainless Steel	<b>NT048C-THC-S3</b> <i>Nuts - Thumb - Collared - Stainless</i>
11.10 (0.44")	4.76 (0.19")	12.70	9.53 (0.38")	Stainless Steel	<b>NT048C-TH1206-S3</b> <i>Nuts - Thumb - Basic</i>
11.10 (0.44")	4.76 (0.19")	25.40	9.53 (0.38")	Stainless Steel	<b>NT048C-TH2506-S3</b> <i>Nuts - Thumb - Basic</i>
<b>10-32 UNF (4.762mm) Thread Size</b>					
8.70 (0.34")	3.97 (0.16")	12.70		Brass	<b>NT048F-THC-BR</b> <i>Nuts - Thumb - Collared - Brass</i>
8.70 (0.34")	3.97 (0.16")	12.70		Stainless Steel	<b>NT048F-THC-S3</b> <i>Nuts - Thumb - Collared - Stainless</i>
11.10 (0.44")	4.76 (0.19")	12.70	9.53 (0.38")	Stainless Steel	<b>NT048F-TH1206-S3</b> <i>Nuts - Thumb - Basic</i>
11.10 (0.44")	4.76 (0.19")	25.40	9.53 (0.38")	Stainless Steel	<b>NT048F-TH2506-S3</b> <i>Nuts - Thumb - Basic</i>
<b>M5x0.8 (5mm Standard) Thread Size</b>					
11.50 (0.45")	4.00 (0.16")	20.00	10.00 (0.39")	303 Stainless Steel	** NT050M-TH2007-S3 <i>Nuts - Thumb - Basic</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Nuts

Overall Length (C) mm (in.)	Head Width (B) mm (in.)	Head Diameter (A) mm (in.)	Shoulder Diameter mm	Material	Part Number
<b>M6x1 (6mm Standard) Thread Size</b>					
15.00 (0.59")	5.00 (0.20")	24.00	12.00 (0.47")	303 Stainless Steel	* NT060M-TH2410-S3 <i>Nuts - Thumb - Basic</i>
<b>1/4-20 UNC (6.35mm) Thread Size</b>					
9.50 (0.37")	3.97 (0.16")	14.29		Brass	<b>NT064C-THC-BR</b> <i>Nuts - Thumb - Collared - Brass</i>
9.50 (0.37")	3.97 (0.16")	14.29		Stainless Steel	<b>NT064C-THC-S3</b> <i>Nuts - Thumb - Collared - Stainless</i>
12.70 (0.50")	6.35 (0.25")	25.40	12.70 (0.50")	Stainless Steel	<b>NT064C-TH2506-S3</b> <i>Nuts - Thumb - Basic</i>
12.70 (0.50")	6.35 (0.25")	19.05	12.70 (0.50")	Stainless Steel	<b>NT064C-TH1906-S3</b> <i>Nuts - Thumb - Basic</i>
19.10 (0.75")	6.35 (0.25")	25.40	12.70 (0.50")	Stainless Steel	<b>NT064C-TH2512-S3</b> <i>Nuts - Thumb - Basic</i>
25.40 (1.00")	6.35 (0.25")	25.40	12.70 (0.50")	Stainless Steel	<b>NT064C-TH2519-S3</b> <i>Nuts - Thumb - Basic</i>
<b>5/16-18 UNC (7.938mm) Thread Size</b>					
10.30 (0.41")	4.76 (0.19")	15.88		Brass	<b>NT079C-THC-BR</b> <i>Nuts - Thumb - Collared - Brass</i>
10.30 (0.41")	4.76 (0.19")	15.88		Stainless Steel	<b>NT079C-THC-S3</b> <i>Nuts - Thumb - Collared - Stainless</i>
<b>3/8-16 UNC (9.525mm) Thread Size</b>					
11.90 (0.47")	5.56 (0.22")	19.05		Brass	<b>NT095C-THC-BR</b> <i>Nuts - Thumb - Collared - Brass</i>
11.90 (0.47")	5.56 (0.22")	19.05		Stainless Steel	<b>NT095C-THC-S3</b> <i>Nuts - Thumb - Collared - Stainless</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>4-40 UNC (2.845mm) Thread Size</b>					
6.35 (0.25")	13.49 (0.53")	Nylon	7.94 (0.31")		* THS028C-006-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
7.94 (0.31")	12.70 (0.50")	Aluminium	7.94 (0.31")	Plain	<b>THS028C-008-K-AL</b> <i>Screws - Thumb - Knurled - Aluminium</i>
7.94 (0.31")	12.70 (0.50")	Brass	7.94 (0.31")	Zinc Chromate Plated	<b>THS028C-008-K-BZ</b> <i>Screws - Thumb - Knurled - Brass</i>
7.94 (0.31")	12.70 (0.50")	Stainless Steel	7.94 (0.31")	Plain	<b>THS028C-008-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
7.94 (0.31")	15.88 (0.63")	Brass	9.53 (0.38")	Zinc, Clear Chrome Plated	<b>THS028C-008-K-BZ-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
7.94 (0.31")	15.88 (0.63")	Stainless Steel	9.53 (0.38")	Plain	<b>THS028C-008-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
7.94 (0.31")	15.88 (0.63")	Steel	9.53 (0.38")	Zinc Coated	<b>THS028C-008-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
9.53 (0.38")	14.29 (0.56")	Brass	7.94 (0.31")	Zinc Chromate Plated	<b>THS028C-010-K-BZ</b> <i>Screws - Thumb - Knurled - Brass</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	7.94 (0.31")	Plain	<b>THS028C-010-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	7.94 (0.31")	Zinc Coated	<b>THS028C-010-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	16.66 (0.66")	Nylon	7.94 (0.31")		* THS028C-010-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	9.53 (0.38")	Plain	<b>THS028C-010-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
11.11 (0.44")	19.05 (0.75")	Stainless Steel	9.53 (0.38")	Plain	<b>THS028C-011-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
11.11 (0.44")	19.05 (0.75")	Steel	9.53 (0.38")	Zinc Coated	<b>THS028C-011-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	7.94 (0.31")	Plain	<b>THS028C-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	7.94 (0.31")	Zinc Coated	<b>THS028C-013-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	19.84 (0.78")	Nylon	7.94 (0.31")		** <b>THS028C-013-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	26.19 (1.03")	Nylon	7.94 (0.31")		** <b>THS028C-019-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	34.93 (1.38")	303 Stainless Steel	4.76 (0.19")		<b>THS028C-025-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
<b>M3x0.5 (3mm Standard) Thread Size</b>					
6.00 (0.24")	10.50 (0.41")	Stainless Steel	12.00 (0.47")	Plain	** <b>THS030M-006-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
8.00 (0.31")	13.00 (0.51")	Stainless Steel	8.00 (0.31")	Plain	<b>THS030M-008L-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
8.00 (0.31")	12.50 (0.49")	Stainless Steel	12.00 (0.47")	Plain	* <b>THS030M-008-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
10.00 (0.39")	14.50 (0.57")	Stainless Steel	12.00 (0.47")	Plain	** <b>THS030M-010-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
11.00 (0.43")	16.00 (0.63")	Stainless Steel	8.00 (0.31")	Plain	<b>THS030M-011-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	8.00 (0.31")	Plain	<b>THS030M-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	18.50 (0.73")	Stainless Steel	12.00 (0.47")	Plain	* <b>THS030M-014-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (T) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>M3.5x0.6 (3.5mm Standard) Thread Size</b>					
8.00 (0.31")	13.00 (0.51")	Stainless Steel	8.00 (0.31")	Plain	<b>THS035M-008-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	8.00 (0.31")	Plain	<b>THS035M-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>6-32 UNC (3.5mm) Thread Size</b>					
6.35 (0.25")	13.49 (0.53")	Nylon			* THS035C-006-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
7.94 (0.31")	12.70 (0.50")	Aluminium	7.94 (0.31")	Plain	<b>THS035C-008-K-AL</b> <i>Screws - Thumb - Knurled - Aluminium</i>
7.94 (0.31")	12.70 (0.50")	Stainless Steel	7.94 (0.31")	Plain	<b>THS035C-008-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
7.94 (0.31")	12.70 (0.50")	Steel	7.94 (0.31")	Zinc Coated	<b>THS035C-008-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	12.70 (0.50")	Nylon	9.53 (0.38")		<b>THS035C-010-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	7.94 (0.31")	Plain	<b>THS035C-010-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	7.94 (0.31")	Zinc Coated	<b>THS035C-010-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	16.66 (0.66")	Nylon			* THS035C-010-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
9.53 (0.38")	17.46 (0.69")	Brass	9.53 (0.38")	Zinc, Clear Chrome Plated	<b>THS035C-010-K-BZ-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	9.53 (0.38")	Plain	<b>THS035C-010-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	17.46 (0.69")	Steel	9.53 (0.38")	Zinc Coated	<b>THS035C-010-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Black Oxide	* THS035C-010-KL-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		11.11 (0.44")	Nickel Plated	* THS035C-010-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Black Oxide	* THS035C-010-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Nickel Plated	* THS035C-010-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Nickel Plated	* THS035C-010-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
11.11 (0.44")	19.05 (0.75")	Aluminium	9.53 (0.38")	Plain	<b>THS035C-011-K-AL-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
11.11 (0.44")	19.05 (0.75")	Stainless Steel	9.53 (0.38")	Plain	<b>THS035C-011-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
11.11 (0.44")	19.05 (0.75")	Steel	9.53 (0.38")	Zinc Coated	<b>THS035C-011-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
11.11 (0.44")	19.05 (0.75")	303 Stainless Steel	11.11 (0.44")		<b>THS035C-019-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
11.11 (0.44")	25.40 (1.00")	303 Stainless Steel	6.35 (0.25")		<b>THS035C-011-K-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
12.70 (0.50")	15.88 (0.63")	Nylon	9.53 (0.38")		<b>THS035C-013-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Brass	7.94 (0.31")	Zinc Chromate Plated	<b>THS035C-013-K-BZ</b> <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	7.94 (0.31")	Plain	<b>THS035C-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	7.94 (0.31")	Zinc Coated	<b>THS035C-013-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	20.64 (0.81")	Aluminium	9.53 (0.38")	Plain	<b>THS035C-013-K-AL-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
12.70 (0.50")	20.64 (0.81")	Stainless Steel	9.53 (0.38")	Plain	<b>THS035C-013-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
12.70 (0.50")	20.64 (0.81")	Steel	9.53 (0.38")	Zinc Coated	<b>THS035C-013-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
12.70 (0.50")	19.84 (0.78")	Nylon			* THS035C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	20.64 (0.81")		9.53 (0.38")	Black Oxide	* THS035C-013-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		9.53 (0.38")	Nickel Plated	* THS035C-013-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		12.70 (0.50")	Nickel Plated	* THS035C-013-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		12.70 (0.50")	Black Oxide	* THS035C-013-KL-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		11.11 (0.44")	Nickel Plated	* THS035C-013-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
14.29 (0.56")	22.23 (0.88")	303 Stainless Steel	11.11 (0.44")		<b>THS035C-022-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
19.05 (0.75")	26.19 (1.03")	Nylon			** <b>THS035C-019-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	32.54 (1.28")	Nylon			** <b>THS035C-025-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	34.93 (1.38")	303 Stainless Steel	4.76 (0.19")		<b>THS035C-025-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
<b>M4x0.7 (4mm Standard) Thread Size</b>					
8.00 (0.31")	13.00 (0.51")	Steel	15.50 (0.61")	Zinc Plated	<b>THS040M-008-K-Z</b> <i>Screws - Thumb - Knurled - Steel</i>
8.00 (0.31")	13.50 (0.53")	Stainless Steel	16.00 (0.63")	Plain	** <b>THS040M-008-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
9.00 (0.35")	14.00 (0.55")	Stainless Steel	10.00 (0.39")	Plain	<b>THS040M-009-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
10.00 (0.39")	15.50 (0.61")	Stainless Steel	16.00 (0.63")	Plain	* <b>THS040M-010-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
11.00 (0.43")	16.00 (0.63")	Stainless Steel	10.00 (0.39")	Plain	<b>THS040M-011-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	10.00 (0.39")	Plain	<b>THS040M-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	19.00 (0.75")	Stainless Steel	10.00 (0.39")	Plain	<b>THS040M-014-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	19.50 (0.77")	Stainless Steel	16.00 (0.63")	Plain	* <b>THS040M-014-KL-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")	21.00 (0.83")	Stainless Steel	10.00 (0.39")	Plain	<b>THS040M-016-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
17.00 (0.67")	23.50 (0.93")	Stainless Steel	16.00 (0.63")	Plain	* <b>THS040M-017-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts



# Thumb Screws

Thread Length (TL) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>8-32 UNC (4.166mm) Thread Size</b>					
7.94 (0.31")	15.88 (0.63")	303 Stainless Steel	11.11 (0.44")		<b>THS042C-016-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
7.94 (0.31")	15.88 (0.63")	303 Stainless Steel	12.70 (0.50")		<b>THS042C-016-KL-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
9.53 (0.38")	13.11 (0.52")	Nylon			* THS042C-010-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
9.53 (0.38")	14.29 (0.56")	Nylon	9.53 (0.38")		<b>THS042C-010-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	9.53 (0.38")	Plain	<b>THS042C-010-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	9.53 (0.38")	Zinc Coated	<b>THS042C-010-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	15.88 (0.63")	303 Stainless Steel	9.53 (0.38")		<b>THS042C-010-K-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	11.11 (0.44")	Plain	<b>THS042C-010-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	17.46 (0.69")	Steel	11.11 (0.44")	Zinc Coated	<b>THS042C-010-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
9.53 (0.38")	17.46 (0.69")	303 Stainless Steel	12.70 (0.50")		<b>THS042C-017-KL-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
9.53 (0.38")	17.46 (0.69")	303 Stainless Steel	11.11 (0.44")		<b>THS042C-017-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
10.30 (0.41")	18.26 (0.72")	Brass	11.11 (0.44")	Black Oxide	** <b>THS042C-010-K-BB-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Nickel Plated	* THS042C-010-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		11.11 (0.44")	Nickel Plated	* THS042C-010-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Black Oxide	* THS042C-010-KL-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Nickel Plated	* THS042C-010-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Black Oxide	* THS042C-010-KS-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
11.11 (0.44")	19.05 (0.75")	303 Stainless Steel	12.70 (0.50")		<b>THS042C-019-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")		Carbon Steel		Zinc Plated	<b>THS042C-013-F-CZ-NT</b> <i>Screws - Thumb - Nylon Tip</i>
12.70 (0.50")	16.28 (0.64")	Nylon			** <b>THS042C-013-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Brass	9.53 (0.38")	Zinc Chromate Plated	<b>THS042C-013-K-BZ</b> <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Nylon	9.53 (0.38")		<b>THS042C-013-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	9.53 (0.38")	Plain	<b>THS042C-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	9.53 (0.38")	Zinc Coated	<b>THS042C-013-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	20.64 (0.81")	303 Stainless Steel	11.11 (0.44")		<b>THS042C-021-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")	20.64 (0.81")	303 Stainless Steel	12.70 (0.50")		<b>THS042C-021-KL-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")	20.64 (0.81")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	<b>THS042C-013-K-BZ-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")	Stainless Steel	11.11 (0.44")	Plain	<b>THS042C-013-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
12.70 (0.50")	20.64 (0.81")	Steel	11.11 (0.44")	Zinc Coated	<b>THS042C-013-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	22.23 (0.88")	303 Stainless Steel	4.76 (0.19")		<b>THS042C-013-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
12.70 (0.50")	20.64 (0.81")		9.53 (0.38")	Nickel Plated	* THS042C-013-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		11.11 (0.44")	Nickel Plated	* THS042C-013-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		11.11 (0.44")	Black Oxide	* THS042C-013-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
15.88 (0.63")	20.64 (0.81")	Brass	9.53 (0.38")	Zinc Chromate Plated	<b>THS042C-016-K-BZ</b> <i>Screws - Thumb - Knurled - Brass</i>
15.88 (0.63")	20.64 (0.81")	Stainless Steel	9.53 (0.38")	Plain	<b>THS042C-016-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
15.88 (0.63")	20.64 (0.81")	Steel	9.53 (0.38")	Zinc Coated	<b>THS042C-016-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
15.88 (0.63")	23.81 (0.94")	Aluminium	11.11 (0.44")	Plain	<b>THS042C-016-K-AL-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
15.88 (0.63")	23.81 (0.94")	Stainless Steel	11.11 (0.44")	Plain	<b>THS042C-016-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
15.88 (0.63")	23.81 (0.94")	Steel	11.11 (0.44")	Zinc Coated	<b>THS042C-016-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	12.70 (0.50")		<b>THS042C-024-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
19.05 (0.75")		Carbon Steel		Zinc Plated	<b>THS042C-019-F-CZ-NT</b> <i>Screws - Thumb - Nylon Tip</i>
19.05 (0.75")	22.63 (0.89")	Nylon			* THS042C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylon	9.53 (0.38")		<b>THS042C-019-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
20.64 (0.81")	38.10 (1.50")	303 Stainless Steel	6.35 (0.25")		<b>THS042C-021-K-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	34.93 (1.38")	303 Stainless Steel	4.76 (0.19")		<b>THS042C-025-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	28.98 (1.14")	Nylon			* THS042C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>10-24 UNC (4.762mm) Thread Size</b>					
12.70 (0.50")	17.46 (0.69")	Nylon	9.53 (0.38")		<b>THS048C-013-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	25.40 (1.00")	303 Stainless Steel	6.35 (0.25")		<b>THS048C-013-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Heac</i>
12.70 (0.50")	28.58 (1.13")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS048C-013-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
12.70 (0.50")	16.28 (0.64")	Nylon			* THS048C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	22.63 (0.89")	Nylon			* THS048C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylon	12.70 (0.50")		<b>THS048C-019-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylon	19.05 (0.75")		<b>THS048C-019-KL-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	34.93 (1.38")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS048C-019-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")		Steel	19.05 (0.75")	Black Oxide	<b>THS048C-019-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
25.40 (1.00")	38.10 (1.50")	Hardened Steel	#Error	Black Oxide	<b>THS048C-025-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	Unhardened Steel	#Error	Black Oxide	<b>THS048C-025-Q-CS</b> <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	6.35 (0.25")		<b>THS048C-025-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Heac</i>
25.40 (1.00")	41.28 (1.63")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS048C-025-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	28.98 (1.14")	Nylon			* THS048C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
31.75 (1.25")		Steel	19.05 (0.75")	Black Oxide	<b>THS048C-032-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
38.10 (1.50")	53.98 (2.13")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS048C-038-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")		303 Stainless Steel	15.88 (0.63")		<b>THS048C-038-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
38.10 (1.50")		12L14 Steel	15.88 (0.63")	Black Oxide	<b>THS048C-038-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
44.45 (1.75")		Steel	19.05 (0.75")	Black Oxide	<b>THS048C-044-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
50.80 (2.00")		12L14 Steel	15.88 (0.63")	Black Oxide	<b>THS048C-051-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		303 Stainless Steel	15.88 (0.63")		** <b>THS048C-051-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
<b>3/16-24 BSW (4.762mm) Thread Size</b>					
12.70 (0.50")	31.80 (1.25")	Steel	13.70 (0.54")	Zinc Plated	<b>THS048W-013-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	30.40 (1.20")	Steel	13.70 (0.54")	Zinc Plated	<b>THS048W-019-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	44.50 (1.75")	Steel	13.70 (0.54")	Zinc Plated	<b>THS048W-025-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

Page 11 of 27

EOE

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>10-32 UNF (4.762mm) Thread Size</b>					
7.94 (0.31")	15.88 (0.63")	303 Stainless Steel	12.70 (0.50")		<b>THS048F-016-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
9.53 (0.38")	14.29 (0.56")	Aluminium	11.11 (0.44")	Plain	<b>THS048F-010-K-AL</b> <i>Screws - Thumb - Knurled - Aluminium</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	11.11 (0.44")	Plain	<b>THS048F-010-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	11.11 (0.44")	Zinc Coated	<b>THS048F-010-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	17.46 (0.69")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	<b>THS048F-010-K-BZ-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	11.11 (0.44")	Plain	<b>THS048F-010-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	17.46 (0.69")	Steel	11.11 (0.44")	Zinc Coated	<b>THS048F-010-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
9.53 (0.38")	17.46 (0.69")	303 Stainless Steel	12.70 (0.50")		<b>THS048F-017-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Nickel Plated	* THS048F-010-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		11.11 (0.44")	Nickel Plated	* THS048F-010-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Nickel Plated	* THS048F-010-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
11.11 (0.44")	19.05 (0.75")	303 Stainless Steel	12.70 (0.50")		<b>THS048F-019-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")		Carbon Steel		Zinc Plated	<b>THS048F-013-F-CZ-NT</b> <i>Screws - Thumb - Nylon Tip</i>
12.70 (0.50")	16.28 (0.64")	Nylon			** <b>THS048F-013-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Aluminium	11.11 (0.44")	Plain	<b>THS048F-013-K-AL</b> <i>Screws - Thumb - Knurled - Aluminium</i>
12.70 (0.50")	17.46 (0.69")	Brass	11.11 (0.44")	Zinc Chromate Plated	<b>THS048F-013-K-BZ</b> <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Nylon	9.53 (0.38")		<b>THS048F-013-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	11.11 (0.44")	Plain	<b>THS048F-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	11.11 (0.44")	Zinc Coated	<b>THS048F-013-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	20.64 (0.81")	303 Stainless Steel	12.70 (0.50")		<b>THS048F-021-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")	20.64 (0.81")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	<b>THS048F-013-K-BZ-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")	Stainless Steel	11.11 (0.44")	Plain	<b>THS048F-013-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
12.70 (0.50")	20.64 (0.81")	Steel	11.11 (0.44")	Zinc Coated	<b>THS048F-013-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	25.40 (1.00")	303 Stainless Steel	6.35 (0.25")		<b>THS048F-013-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
14.29 (0.56")	22.23 (0.88")	303 Stainless Steel	12.70 (0.50")		<b>THS048F-022-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
15.88 (0.63")	20.64 (0.81")	Aluminium	11.11 (0.44")	Plain	<b>THS048F-016-K-AL</b> <i>Screws - Thumb - Knurled - Aluminium</i>
15.88 (0.63")	20.64 (0.81")	Brass	11.11 (0.44")	Zinc Chromate Plated	<b>THS048F-016-K-BZ</b> <i>Screws - Thumb - Knurled - Brass</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
15.88 (0.63")	20.64 (0.81")	Stainless Steel	11.11 (0.44")	Plain	<b>THS048F-016-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
15.88 (0.63")	20.64 (0.81")	Steel	11.11 (0.44")	Zinc Coated	<b>THS048F-016-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
15.88 (0.63")	23.81 (0.94")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	<b>THS048F-016-K-BZ-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
15.88 (0.63")	23.81 (0.94")	Stainless Steel	11.11 (0.44")	Plain	<b>THS048F-016-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
15.88 (0.63")	23.81 (0.94")	Steel	11.11 (0.44")	Zinc Coated	<b>THS048F-016-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	12.70 (0.50")		<b>THS048F-016-K-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	12.70 (0.50")		<b>THS048F-024-K-3-SHL</b> <i>Screws - Thumb - Shoulder</i>
19.05 (0.75")		Carbon Steel		Zinc Plated	<b>THS048F-019-F-CZ-NT</b> <i>Screws - Thumb - Nylon Tip</i>
19.05 (0.75")	22.63 (0.89")	Nylon			* THS048F-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylon	12.70 (0.50")		<b>THS048F-019-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylon	19.05 (0.75")		<b>THS048F-019-KL-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
22.23 (0.88")	42.86 (1.69")	Steel	#Error	Black Oxide	<b>THS048F-022-H-CB</b> <i>Screws - Thumb - Half Turn</i>
25.40 (1.00")		Carbon Steel		Zinc Plated	<b>THS048F-025-F-CZ-NT</b> <i>Screws - Thumb - Nylon Tip</i>
25.40 (1.00")	30.16 (1.19")	Nylon	19.05 (0.75")		<b>THS048F-025-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	19.05 (0.75")		<b>THS048F-025-KL-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	12.70 (0.50")		<b>THS048F-025-K-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	38.10 (1.50")	Unhardened Steel	#Error	Black Oxide	<b>THS048F-025-Q-CS</b> <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	Hardened Steel	#Error	Black Oxide	<b>THS048F-025-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	#Error		<b>THS048F-025-Q-3</b> <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	6.35 (0.25")		<b>THS048F-025-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	28.98 (1.14")	Nylon			* THS048F-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	50.80 (2.00")	Unhardened Steel	#Error	Black Oxide	<b>THS048F-038-Q-CS</b> <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	50.80 (2.00")	303 Stainless Steel	#Error		<b>THS048F-038-Q-3</b> <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	50.80 (2.00")	Hardened Steel	#Error	Black Oxide	<b>THS048F-038-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")		12L14 Steel	15.88 (0.63")	Black Oxide	<b>THS048F-038-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
38.10 (1.50")		303 Stainless Steel	15.88 (0.63")		<b>THS048F-038-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		12L14 Steel	15.88 (0.63")	Black Oxide	<b>THS048F-051-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		303 Stainless Steel	15.88 (0.63")		<b>THS048F-051-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>M5x0.8 (5mm Standard) Thread Size</b>					
9.00 (0.35")	14.00 (0.55")	Stainless Steel	11.00 (0.43")	Plain	<b>THS050M-009-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
10.00 (0.39")	16.00 (0.63")	Stainless Steel	20.00 (0.79")	Plain	<b>** THS050M-010-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
11.00 (0.43")	16.00 (0.63")	Stainless Steel	11.00 (0.43")	Plain	<b>* THS050M-011-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
12.00 (0.47")	23.70 (0.93")	Steel	13.70 (0.54")	Zinc Plated	<b>THS050M-012-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	11.00 (0.43")	Plain	<b>THS050M-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	20.00 (0.79")	Stainless Steel	20.00 (0.79")	Plain	<b>* THS050M-014-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")	21.00 (0.83")	Stainless Steel	11.00 (0.43")	Plain	<b>THS050M-016-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")	27.70 (1.09")	Steel	13.70 (0.54")	Zinc Plated	<b>THS050M-016-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
17.00 (0.67")	24.00 (0.94")	Stainless Steel	20.00 (0.79")	Plain	<b>* THS050M-017-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
20.00 (0.79")	31.70 (1.25")	Steel	13.70 (0.54")	Zinc Plated	<b>THS050M-020-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
22.00 (0.87")	29.00 (1.14")	Stainless Steel	20.00 (0.79")	Plain	<b>* THS050M-022-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
25.00 (0.98")	36.70 (1.44")	Steel	13.70 (0.54")	Zinc Plated	<b>THS050M-025-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
27.00 (1.06")	34.00 (1.34")	Stainless Steel	20.00 (0.79")	Plain	<b>* THS050M-027-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
<b>M6x1 (6mm Standard) Thread Size</b>					
12.00 (0.47")		Steel		Zinc Plated	<b>THS060M-012-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
13.00 (0.51")	19.00 (0.75")	Stainless Steel	13.00 (0.51")	Plain	<b>THS060M-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	21.00 (0.83")	Stainless Steel	13.00 (0.51")	Plain	<b>THS060M-014-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	21.00 (0.83")	Stainless Steel	24.00 (0.94")	Plain	<b>* THS060M-014-KL-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")		Steel		Zinc Plated	<b>THS060M-016-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
16.00 (0.63")	22.00 (0.87")	Stainless Steel	13.00 (0.51")	Plain	<b>THS060M-016-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")	25.00 (0.98")	Stainless Steel	24.00 (0.94")	Plain	<b>* THS060M-016-KL-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
18.00 (0.71")	24.00 (0.94")	Stainless Steel	13.00 (0.51")	Plain	<b>THS060M-018-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
19.00 (0.75")	25.00 (0.98")	Stainless Steel	13.00 (0.51")	Plain	<b>THS060M-019-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
20.00 (0.79")		Steel		Zinc Plated	<b>THS060M-020-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
21.00 (0.83")	30.00 (1.18")	Stainless Steel	24.00 (0.94")	Plain	<b>* THS060M-021-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
25.00 (0.98")		Steel		Zinc Plated	<b>THS060M-025-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
26.00 (1.02")	35.00 (1.38")	Stainless Steel	24.00 (0.94")	Plain	<b>* THS060M-026-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
40.00 (1.57")		Steel		Zinc Plated	<b>THS060M-040-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts



# Thumb Screws

Thread Length (TI) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>1/4-20 UNC (6.35mm) Thread Size</b>					
9.53 (0.38")	19.05 (0.75")	Aluminium	12.70 (0.50")	Plain	<b>THS064C-010-K-AL-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
9.53 (0.38")	19.05 (0.75")	Stainless Steel	12.70 (0.50")	Plain	<b>THS064C-010-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	19.05 (0.75")	Steel	12.70 (0.50")	Zinc Coated	<b>THS064C-010-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")		Carbon Steel		Zinc Plated	<b>THS064C-013-F-CZ-NT</b> <i>Screws - Thumb - Nylon Tip</i>
12.70 (0.50")	16.66 (0.66")	Nylon			<b>** THS064C-013-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	19.05 (0.75")	Aluminium	12.70 (0.50")	Plain	<b>THS064C-013-K-AL</b> <i>Screws - Thumb - Knurled - Aluminium</i>
12.70 (0.50")	19.05 (0.75")	Brass	12.70 (0.50")	Zinc Chromate Plated	<b>THS064C-013-K-BZ</b> <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	19.05 (0.75")	Stainless Steel	12.70 (0.50")	Plain	<b>THS064C-013-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	19.05 (0.75")	Steel	12.70 (0.50")	Zinc Coated	<b>THS064C-013-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	22.23 (0.88")	Aluminium	12.70 (0.50")	Plain	<b>THS064C-013-K-AL-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
12.70 (0.50")	22.23 (0.88")	Brass	12.70 (0.50")	Zinc, Clear Chrome Plated	<b>THS064C-013-K-BZ-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	22.23 (0.88")	Stainless Steel	12.70 (0.50")	Plain	<b>THS064C-013-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
12.70 (0.50")	22.23 (0.88")	Steel	12.70 (0.50")	Zinc Coated	<b>THS064C-013-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	25.40 (1.00")	303 Stainless Steel	7.94 (0.31")		<b>THS064C-013-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
12.70 (0.50")	28.58 (1.13")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS064C-013-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
12.70 (0.50")	28.58 (1.13")	Steel	20.64 (0.81")	Tumbled	<b>THS064C-013-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
12.70 (0.50")	33.34 (1.31")	Steel	31.75 (1.25")	Tumbled	<b>THS064C-013-W-CS-WF</b> <i>Screws - Thumb - Wing - Washer Face - Steel</i>
15.88 (0.63")	22.23 (0.88")	Stainless Steel	12.70 (0.50")	Plain	<b>THS064C-016-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
15.88 (0.63")	22.23 (0.88")	Steel	12.70 (0.50")	Zinc Coated	<b>THS064C-016-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	19.05 (0.75")		<b>THS064C-016-K-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	25.40 (1.00")		<b>THS064C-016-KL-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
15.88 (0.63")	25.40 (1.00")	Brass	12.70 (0.50")	Zinc, Clear Chrome Plated	<b>THS064C-016-K-BZ-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
15.88 (0.63")	25.40 (1.00")	Stainless Steel	12.70 (0.50")	Plain	<b>THS064C-016-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
15.88 (0.63")	25.40 (1.00")	Steel	12.70 (0.50")	Zinc Coated	<b>THS064C-016-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
19.05 (0.75")	23.01 (0.91")	Nylon			<b>* THS064C-019-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylon	12.70 (0.50")		<b>THS064C-019-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylon	19.05 (0.75")		<b>THS064C-019-KL-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
19.05 (0.75")	25.40 (1.00")	Aluminium	12.70 (0.50")	Plain	<b>THS064C-019-K-AL</b> <i>Screws - Thumb - Knurled - Aluminium</i>
19.05 (0.75")	25.40 (1.00")	Brass	12.70 (0.50")	Zinc Chromate Plated	<b>THS064C-019-K-BZ</b> <i>Screws - Thumb - Knurled - Brass</i>
19.05 (0.75")	25.40 (1.00")	Stainless Steel	12.70 (0.50")	Plain	<b>THS064C-019-K-3</b> <i>Screws - Thumb - Knurled - Stainless</i>
19.05 (0.75")	25.40 (1.00")	Steel	12.70 (0.50")	Zinc Coated	<b>THS064C-019-K-CZ</b> <i>Screws - Thumb - Knurled - Steel</i>
19.05 (0.75")	28.58 (1.13")	Aluminium	12.70 (0.50")	Plain	<b>THS064C-019-K-AL-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
19.05 (0.75")	28.58 (1.13")	Brass	12.70 (0.50")	Zinc, Clear Chrome Plated	<b>THS064C-019-K-BZ-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
19.05 (0.75")	28.58 (1.13")	Stainless Steel	12.70 (0.50")	Plain	<b>THS064C-019-K-SS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
19.05 (0.75")	28.58 (1.13")	Steel	12.70 (0.50")	Zinc Coated	<b>THS064C-019-K-CS-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
19.05 (0.75")	34.93 (1.38")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS064C-019-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	34.93 (1.38")	Steel	20.64 (0.81")	Tumbled	<b>THS064C-019-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
19.05 (0.75")	39.69 (1.56")	Steel	31.75 (1.25")	Tumbled	<b>THS064C-019-W-CS-WF</b> <i>Screws - Thumb - Wing - Washer Face - Steel</i>
25.40 (1.00")	29.36 (1.16")	Nylon			<b>** THS064C-025-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	30.16 (1.19")	Nylon	19.05 (0.75")		<b>THS064C-025-K-NY</b> <i>Screws - Thumb - Knurled - Nylon</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	25.40 (1.00")		<b>THS064C-025-KL-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	19.05 (0.75")		<b>THS064C-025-K-3-N</b> <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	7.94 (0.31")		<b>THS064C-025-K-3-P</b> <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	41.28 (1.63")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS064C-025-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	41.28 (1.63")	Steel	20.64 (0.81")	Tumbled	<b>THS064C-025-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")	46.04 (1.81")	Steel	31.75 (1.25")	Tumbled	<b>THS064C-025-W-CS-WF</b> <i>Screws - Thumb - Wing - Washer Face - Steel</i>
25.40 (1.00")	50.80 (2.00")	Steel	#Error	Black Oxide	<b>THS064C-025-H-CB</b> <i>Screws - Thumb - Half Turn</i>
31.75 (1.25")	47.63 (1.88")	Hardened Steel	#Error	Black Oxide	<b>THS064C-032-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
31.75 (1.25")	47.63 (1.88")	303 Stainless Steel	#Error		<b>THS064C-032-Q-3</b> <i>Screws - Thumb - 1-4 Turn</i>
31.75 (1.25")	47.63 (1.88")	Unhardened Steel	#Error	Black Oxide	<b>THS064C-032-Q-CS</b> <i>Screws - Thumb - 1-4 Turn</i>
31.75 (1.25")	47.63 (1.88")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS064C-032-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
31.75 (1.25")		Steel	645.16 (25.40")	Black Oxide	<b>THS064C-032-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
38.10 (1.50")	53.98 (2.13")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS064C-038-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	53.98 (2.13")	Steel	20.64 (0.81")	Tumbled	<b>THS064C-038-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
38.10 (1.50")	58.74 (2.31")	Steel	31.75 (1.25")	Tumbled	<b>THS064C-038-W-CS-WF</b> <i>Screws - Thumb - Wing - Washer Face - Steel</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts



# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
38.10 (1.50")		12L14 Steel	17.46 (0.69")	Black Oxide	<b>THS064C-038-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
38.10 (1.50")		303 Stainless Steel	17.46 (0.69")		<b>THS064C-038-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
44.45 (1.75")	60.33 (2.38")	Unhardened Steel	#Error	Black Oxide	<b>THS064C-044-Q-CS</b> <i>Screws - Thumb - 1-4 Turn</i>
44.45 (1.75")	60.33 (2.38")	303 Stainless Steel	#Error		<b>THS064C-044-Q-3</b> <i>Screws - Thumb - 1-4 Turn</i>
44.45 (1.75")	60.33 (2.38")	Hardened Steel	#Error	Black Oxide	<b>THS064C-044-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
44.45 (1.75")		Steel	645.16 (25.40")	Black Oxide	<b>THS064C-044-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
50.80 (2.00")	66.68 (2.63")	Malleable Iron	22.23 (0.88")	Tumbled	<b>THS064C-051-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
50.80 (2.00")	66.68 (2.63")	Steel	20.64 (0.81")	Tumbled	<b>THS064C-051-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
50.80 (2.00")	71.44 (2.81")	Steel	31.75 (1.25")	Tumbled	<b>THS064C-051-W-CS-WF</b> <i>Screws - Thumb - Wing - Washer Face - Steel</i>
50.80 (2.00")		Nylon			<b>** THS064C-051-F-NY</b> <i>Screws - Thumb - Flat Key Head - Nylon</i>
57.15 (2.25")		Steel	645.16 (25.40")	Black Oxide	<b>THS064C-057-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
63.50 (2.50")		12L14 Steel	17.46 (0.69")	Black Oxide	<b>THS064C-064-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
63.50 (2.50")		303 Stainless Steel	17.46 (0.69")		<b>THS064C-064-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
<b>1/4-20 BSW (6.35mm) Thread Size</b>					
12.70 (0.50")		Steel		Zinc Plated	<b>THS064W-013-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
19.10 (0.75")		Steel		Zinc Plated	<b>THS064W-019-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")		Steel		Zinc Plated	<b>THS064W-025-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
31.80 (1.25")		Steel		Zinc Plated	<b>THS064W-032-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")		Steel		Zinc Plated	<b>THS064W-038-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

Page 17 of 27

E0E

# Thumb Screws

Thread Length (TL) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>5/16-18 UNC (7.938mm) Thread Size</b>					
12.70 (0.50")	30.16 (1.19")	Malleable Iron	25.40 (1.00")	Tumbled	<b>THS079C-013-FL-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
12.70 (0.50")	31.75 (1.25")		44.45 (1.75")		* THS079C-013-W-CS <i>Screws - Thumb - Wing - Steel</i>
12.70 (0.50")	17.07 (0.67")	Nylon			* THS079C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")		Steel		Zinc Plated	<b>THS079W-019-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	36.51 (1.44")	Malleable Iron	25.40 (1.00")	Tumbled	<b>THS079C-019-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	38.10 (1.50")	Steel	44.45 (1.75")		<b>THS079C-019-W-CS</b> <i>Screws - Thumb - Wing - Steel</i>
19.05 (0.75")	39.69 (1.56")	Steel	25.40 (1.00")	Tumbled	<b>THS079C-019-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")		Steel		Zinc Plated	<b>THS079W-025-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	26.99 (1.06")	Steel	#Error	Black Oxide	<b>THS079C-025-H-CB</b> <i>Screws - Thumb - Half Turn</i>
25.40 (1.00")	42.86 (1.69")	Malleable Iron	25.40 (1.00")	Tumbled	<b>THS079C-025-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	44.45 (1.75")	Steel	44.45 (1.75")		<b>THS079C-025-W-CS</b> <i>Screws - Thumb - Wing - Steel</i>
25.40 (1.00")	29.77 (1.17")	Nylon			* THS079C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
31.75 (1.25")	49.21 (1.94")	Malleable Iron	25.40 (1.00")	Tumbled	<b>THS079C-032-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
31.75 (1.25")		Steel	28.58 (1.13")	Black Oxide	<b>THS079C-032-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
31.80 (1.25")		Steel		Zinc Plated	<b>THS079W-032-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")		Steel		Zinc Plated	<b>THS079W-038-F-CS</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	42.47 (1.67")	Nylon			* THS079C-038-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	55.56 (2.19")	Malleable Iron	25.40 (1.00")	Tumbled	<b>THS079C-038-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	57.15 (2.25")	303 Stainless Steel	#Error		<b>THS079C-038-Q-3</b> <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	57.15 (2.25")	Unhardened Steel	#Error	Black Oxide	<b>THS079C-038-Q-CS</b> <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	57.15 (2.25")	Hardened Steel	#Error	Black Oxide	<b>THS079C-038-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	57.15 (2.25")	Steel	44.45 (1.75")		<b>THS079C-038-W-CS</b> <i>Screws - Thumb - Wing - Steel</i>
38.10 (1.50")	58.74 (2.31")	Steel	25.40 (1.00")	Tumbled	<b>THS079C-038-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
44.45 (1.75")		Steel	28.58 (1.13")	Black Oxide	<b>THS079C-044-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
44.45 (1.75")		12L14 Steel	19.05 (0.75")	Black Oxide	<b>THS079C-044-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
44.45 (1.75")		303 Stainless Steel	19.05 (0.75")		<b>THS079C-044-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")	55.17 (2.17")	Nylon			** THS079C-051-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
50.80 (2.00")	68.26 (2.69")	Malleable Iron	25.40 (1.00")	Tumbled	<b>THS079C-051-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
57.15 (2.25")		Steel	28.58 (1.13")	Black Oxide	<b>THS079C-057-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
57.15 (2.25")		303 Stainless Steel	19.05 (0.75")		<b>THS079C-057-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
57.15 (2.25")		12L14 Steel	19.05 (0.75")	Black Oxide	<b>THS079C-057-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
69.85 (2.75")	69.85 (2.75")	Hardened Steel	#Error	Black Oxide	<b>THS079C-070-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
76.20 (3.00")		12L14 Steel	19.05 (0.75")	Black Oxide	<b>THS079C-076-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
76.20 (3.00")		303 Stainless Steel	19.05 (0.75")		<b>THS079C-076-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (TL) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
<b>3/8-16 UNC (9.525mm) Thread Size</b>					
12.70 (0.50")	17.46 (0.69")	Nylon			<b>** THS095C-013-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	34.93 (1.38")	Steel	31.75 (1.25")	Tumbled	<b>THS095C-013-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
19.05 (0.75")	38.10 (1.50")	Malleable Iron	26.99 (1.06")	Tumbled	<b>THS095C-019-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	41.28 (1.63")	Steel	46.04 (1.81")		<b>THS095C-019-W-CS</b> <i>Screws - Thumb - Wing - Steel</i>
25.40 (1.00")	30.16 (1.19")	Nylon			<b>** THS095C-025-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	44.45 (1.75")	Malleable Iron	26.99 (1.06")	Tumbled	<b>THS095C-025-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	47.63 (1.88")	Steel	31.75 (1.25")	Tumbled	<b>THS095C-025-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")	47.63 (1.88")	Steel	46.04 (1.81")		<b>THS095C-025-W-CS</b> <i>Screws - Thumb - Wing - Steel</i>
25.40 (1.00")	50.80 (2.00")	Steel	36.51 (1.44")	Tumbled	<b>THS095C-025-W-CS-WF</b> <i>Screws - Thumb - Wing - Washer Face - Steel</i>
31.75 (1.25")	50.80 (2.00")	Malleable Iron	26.99 (1.06")	Tumbled	<b>THS095C-032-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	42.86 (1.69")	Nylon			<b>* THS095C-038-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	57.15 (2.25")	Malleable Iron	26.99 (1.06")	Tumbled	<b>THS095C-038-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	60.33 (2.38")	Steel	46.04 (1.81")		<b>THS095C-038-W-CS</b> <i>Screws - Thumb - Wing - Steel</i>
38.10 (1.50")	63.50 (2.50")	Hardened Steel	#Error	Black Oxide	<b>THS095C-038-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	63.50 (2.50")	303 Stainless Steel	#Error		<b>THS095C-038-Q-3</b> <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	63.50 (2.50")	Unhardened Steel	#Error	Black Oxide	<b>THS095C-038-Q-CS</b> <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	68.26 (2.69")	Steel	#Error	Black Oxide	<b>THS095C-038-H-CB</b> <i>Screws - Thumb - Half Turn</i>
44.45 (1.75")		Steel	31.75 (1.25")	Black Oxide	<b>THS095C-044-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
50.80 (2.00")	73.03 (2.88")	Steel	31.75 (1.25")	Tumbled	<b>THS095C-051-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
50.80 (2.00")	76.20 (3.00")	Hardened Steel	#Error	Black Oxide	<b>THS095C-051-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
50.80 (2.00")	76.20 (3.00")	Unhardened Steel	#Error	Black Oxide	<b>THS095C-051-Q-CS</b> <i>Screws - Thumb - 1-4 Turn</i>
50.80 (2.00")		12L14 Steel	22.23 (0.88")	Black Oxide	<b>THS095C-051-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		303 Stainless Steel	22.23 (0.88")		<b>THS095C-051-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")	55.56 (2.19")	Nylon			<b>* THS095C-051-K-NY-WF</b> <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
63.50 (2.50")		303 Stainless Steel	22.23 (0.88")		<b>THS095C-064-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
63.50 (2.50")		12L14 Steel	22.23 (0.88")	Black Oxide	<b>THS095C-064-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
69.85 (2.75")		Steel	31.75 (1.25")	Black Oxide	<b>THS095C-070-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
76.20 (3.00")		303 Stainless Steel	22.23 (0.88")		<b>THS095C-076-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
76.20 (3.00")		12L14 Steel	22.23 (0.88")	Black Oxide	<b>THS095C-076-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>
<b>1/2-13 UNC (12.7mm) Thread Size</b>					
19.05 (0.75")	47.63 (1.88")	Steel	36.51 (1.44")	Tumbled	<b>THS127C-019-F-CS-WF</b> <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")	49.21 (1.94")	Malleable Iron	33.34 (1.31")	Tumbled	<b>THS127C-025-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	30.56 (1.20")	Nylon			* THS127C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
31.75 (1.25")	55.56 (2.19")	Malleable Iron	33.34 (1.31")	Tumbled	<b>THS127C-032-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	43.33 (1.71")	Nylon			* THS127C-038-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	61.91 (2.44")	Malleable Iron	33.34 (1.31")	Tumbled	<b>THS127C-038-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	69.85 (2.75")	Steel	#Error	Black Oxide	<b>THS127C-038-H-CB</b> <i>Screws - Thumb - Half Turn</i>
44.45 (1.75")	69.85 (2.75")	Unhardened Steel	#Error	Black Oxide	<b>THS127C-044-Q-CS</b> <i>Screws - Thumb - 1-4 Turn</i>
44.45 (1.75")	69.85 (2.75")	Hardened Steel	#Error	Black Oxide	<b>THS127C-044-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
50.80 (2.00")	55.96 (2.20")	Nylon			* THS127C-051-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
57.15 (2.25")	82.55 (3.25")	Hardened Steel	#Error	Black Oxide	<b>THS127C-057-Q-CH</b> <i>Screws - Thumb - 1-4 Turn</i>
63.50 (2.50")	87.31 (3.44")	Malleable Iron	33.34 (1.31")	Tumbled	<b>THS127C-064-F-MI</b> <i>Screws - Thumb - Flat Key Head - Steel</i>
69.85 (2.75")		Steel	31.75 (1.25")	Black Oxide	<b>THS127C-070-K-CS-DP</b> <i>Screws - Thumb - Dog Point</i>
76.20 (3.00")	100.01 (3.94")	Malleable Iron	33.34 (1.31")	Tumbled	* THS127C-076-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
76.20 (3.00")	101.60 (4.00")	Steel	57.15 (2.25")		<b>THS127C-076-W-CS</b> <i>Screws - Thumb - Wing - Steel</i>
76.20 (3.00")		303 Stainless Steel	25.40 (1.00")		<b>THS127C-076-K-CS-FT</b> <i>Screws - Thumb - Flat Tip</i>
76.20 (3.00")		12L14 Steel	25.40 (1.00")	Black Oxide	<b>THS127C-076-K-CB-FT</b> <i>Screws - Thumb - Flat Tip</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material	Shank Length (A) mm	Part Number
<b>4-40 UNC (2.845mm) Thread Size</b>				
15.88 (0.63")	3.18 (0.13")	303 Stainless Steel	9.53 (0.38")	* SCC028C-010-016-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
17.46 (0.69")	3.18 (0.13")	303 Stainless Steel	11.11 (0.44")	* SCC028C-011-017-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
17.46 (0.69")	3.18 (0.13")	303 Stainless Steel	9.53 (0.38")	* SCC028C-010-017-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
19.05 (0.75")	3.18 (0.13")	303 Stainless Steel	11.11 (0.44")	* SCC028C-011-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
19.05 (0.75")	3.18 (0.13")	303 Stainless Steel	12.70 (0.50")	* SCC028C-013-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
20.64 (0.81")	3.18 (0.13")	303 Stainless Steel	12.70 (0.50")	* SCC028C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
20.64 (0.81")	3.18 (0.13")	303 Stainless Steel	14.29 (0.56")	* SCC028C-014-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
21.43 (0.84")	7.14 (0.28")	303 Stainless Steel	16.67 (0.66")	* SCC028C-017-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
22.23 (0.88")	3.18 (0.13")	303 Stainless Steel	14.29 (0.56")	* SCC028C-014-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
22.23 (0.88")	3.18 (0.13")	303 Stainless Steel	15.88 (0.63")	* SCC028C-016-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.02 (0.91")	7.14 (0.28")	303 Stainless Steel	18.26 (0.72")	* SCC028C-018-023-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.81 (0.94")	3.18 (0.13")	303 Stainless Steel	17.46 (0.69")	* SCC028C-017-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.81 (0.94")	3.18 (0.13")	303 Stainless Steel	15.88 (0.63")	* SCC028C-016-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
24.61 (0.97")	7.14 (0.28")	303 Stainless Steel	19.84 (0.78")	* SCC028C-020-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	3.18 (0.13")	303 Stainless Steel	19.05 (0.75")	* SCC028C-019-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	3.18 (0.13")	303 Stainless Steel	17.46 (0.69")	* SCC028C-017-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.19 (1.03")	7.14 (0.28")	303 Stainless Steel	21.43 (0.84")	* SCC028C-021-026-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.99 (1.06")	3.18 (0.13")	303 Stainless Steel	20.64 (0.81")	* SCC028C-021-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.99 (1.06")	3.18 (0.13")	303 Stainless Steel	19.05 (0.75")	* SCC028C-019-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
27.78 (1.09")	7.14 (0.28")	303 Stainless Steel	23.02 (0.91")	* SCC028C-023-028-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
28.58 (1.13")	3.18 (0.13")	303 Stainless Steel	22.23 (0.88")	* SCC028C-022-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
28.58 (1.13")	3.18 (0.13")	303 Stainless Steel	20.64 (0.81")	* SCC028C-021-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	3.18 (0.13")	303 Stainless Steel	22.23 (0.88")	* SCC028C-022-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	3.18 (0.13")	303 Stainless Steel	23.81 (0.94")	* SCC028C-024-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
31.75 (1.25")	3.18 (0.13")	303 Stainless Steel	25.40 (1.00")	* SCC028C-025-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
31.75 (1.25")	3.18 (0.13")	303 Stainless Steel	23.81 (0.94")	* SCC028C-024-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
33.34 (1.31")	3.18 (0.13")	303 Stainless Steel	25.40 (1.00")	* SCC028C-025-033-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material	Shank Length (A) mm	Part Number
<b>6-32 UNC (3.5mm) Thread Size</b>				
19.05 (0.75")	5.56 (0.22")	303 Stainless Steel	11.11 (0.44")	<b>SCC035C-011-019-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
20.64 (0.81")	5.56 (0.22")	303 Stainless Steel	12.70 (0.50")	<b>SCC035C-013-021-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
21.43 (0.84")	7.14 (0.28")	303 Stainless Steel	16.67 (0.66")	* SCC035C-017-021B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
21.43 (0.84")	7.14 (0.28")	303 Stainless Steel	16.67 (0.66")	* SCC035C-017-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
22.23 (0.88")	5.56 (0.22")	303 Stainless Steel	14.29 (0.56")	<b>SCC035C-014-022-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
23.02 (0.91")	7.14 (0.28")	303 Stainless Steel	18.26 (0.72")	* SCC035C-018-023-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.02 (0.91")	7.14 (0.28")	303 Stainless Steel	18.26 (0.72")	* SCC035C-018-023B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.81 (0.94")	5.56 (0.22")	303 Stainless Steel	15.88 (0.63")	<b>SCC035C-016-024-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
23.80 (0.94")	4.80 (0.19")	Half-Hard Brass / Black Oxide	19.10 (0.75")	* SCC035C-024-TH-BB <i>Screws - Captive - Thumb - Brass - Black Oxide</i>
23.80 (0.94")	4.80 (0.19")	Half-Hard Brass / Nickel Plated	19.10 (0.75")	* SCC035C-024-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
24.61 (0.97")	7.14 (0.28")	303 Stainless Steel	19.84 (0.78")	* SCC035C-020-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
24.61 (0.97")	7.14 (0.28")	303 Stainless Steel	19.84 (0.78")	* SCC035C-020-025B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	5.56 (0.22")	303 Stainless Steel	17.46 (0.69")	<b>SCC035C-017-025-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
26.19 (1.03")	7.14 (0.28")	303 Stainless Steel	21.43 (0.84")	* SCC035C-021-026B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.19 (1.03")	7.14 (0.28")	303 Stainless Steel	21.43 (0.84")	* SCC035C-021-026-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.99 (1.06")	5.56 (0.22")	303 Stainless Steel	19.05 (0.75")	<b>SCC035C-019-027-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
27.78 (1.09")	7.14 (0.28")	303 Stainless Steel	23.02 (0.91")	* SCC035C-023-028B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
27.78 (1.09")	7.14 (0.28")	303 Stainless Steel	23.02 (0.91")	* SCC035C-023-028-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
28.58 (1.13")	5.56 (0.22")	303 Stainless Steel	20.64 (0.81")	<b>SCC035C-021-029-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	5.56 (0.22")	303 Stainless Steel	22.23 (0.88")	<b>SCC035C-022-030-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
31.75 (1.25")	5.56 (0.22")	303 Stainless Steel	23.81 (0.94")	<b>SCC035C-024-032-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
33.34 (1.31")	5.56 (0.22")	303 Stainless Steel	25.40 (1.00")	<b>SCC035C-025-033-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
34.93 (1.38")	5.56 (0.22")	303 Stainless Steel	26.99 (1.06")	<b>SCC035C-027-035-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
36.51 (1.44")	5.56 (0.22")	303 Stainless Steel	28.58 (1.13")	<b>SCC035C-029-037-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
38.10 (1.50")	5.56 (0.22")	303 Stainless Steel	30.16 (1.19")	<b>SCC035C-030-038-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
39.69 (1.56")	5.56 (0.22")	303 Stainless Steel	31.75 (1.25")	<b>SCC035C-032-040-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts



# Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material	Shank Length (A) mm	Part Number
<b>8-32 UNC (4.166mm) Thread Size</b>				
19.05 (0.75")	5.56 (0.22")	303 Stainless Steel	11.11 (0.44")	<b>SCC042C-011-019-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
20.64 (0.81")	5.56 (0.22")	303 Stainless Steel	12.70 (0.50")	<b>SCC042C-013-021-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
22.23 (0.88")	5.56 (0.22")	303 Stainless Steel	14.29 (0.56")	<b>SCC042C-014-022-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
23.81 (0.94")	5.56 (0.22")	303 Stainless Steel	15.88 (0.63")	<b>SCC042C-016-024-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	5.56 (0.22")	303 Stainless Steel	17.46 (0.69")	<b>SCC042C-017-025-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	19.10 (0.75")	* SCC042C-025-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
25.40 (1.00")	9.50 (0.37")	Half-Hard Brass / Black Oxide	19.10 (0.75")	* SCC042C-025-TH-BB <i>Screws - Captive - Thumb - Brass - Black Oxide</i>
26.99 (1.06")	5.56 (0.22")	303 Stainless Steel	19.05 (0.75")	<b>SCC042C-019-027-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
28.60 (1.13")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	22.20 (0.87")	* SCC042C-029-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
28.58 (1.13")	5.56 (0.22")	303 Stainless Steel	20.64 (0.81")	<b>SCC042C-021-029-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	5.56 (0.22")	303 Stainless Steel	22.23 (0.88")	<b>SCC042C-022-030-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
31.75 (1.25")	5.56 (0.22")	303 Stainless Steel	23.81 (0.94")	<b>SCC042C-024-032-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
33.34 (1.31")	5.56 (0.22")	303 Stainless Steel	25.40 (1.00")	<b>SCC042C-025-033-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
34.93 (1.38")	5.56 (0.22")	303 Stainless Steel	26.99 (1.06")	<b>SCC042C-027-035-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
36.51 (1.44")	5.56 (0.22")	303 Stainless Steel	28.58 (1.13")	<b>SCC042C-029-037-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
38.10 (1.50")	5.56 (0.22")	303 Stainless Steel	30.16 (1.19")	<b>SCC042C-030-038-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
39.69 (1.56")	5.56 (0.22")	303 Stainless Steel	31.75 (1.25")	<b>SCC042C-032-040-TH-S3</b> <i>Screws - Captive - Thumb - 303 Stainless</i>
<b>10-24 UNC (4.762mm) Thread Size</b>				
20.64 (0.81")	6.35 (0.25")	303 Stainless Steel	12.70 (0.50")	* SCC048C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	6.35 (0.25")	303 Stainless Steel	14.29 (0.56")	* SCC048C-014-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.99 (1.06")	6.35 (0.25")	303 Stainless Steel	15.88 (0.63")	* SCC048C-016-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
28.58 (1.13")	6.35 (0.25")	303 Stainless Steel	17.46 (0.69")	* SCC048C-017-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	6.35 (0.25")	303 Stainless Steel	19.05 (0.75")	* SCC048C-019-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
<b>10-32 UNF (4.762mm) Thread Size</b>				
28.60 (1.13")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	22.20 (0.87")	* SCC048F-029-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
28.60 (1.13")	9.50 (0.37")	Half-Hard Brass / Black Oxide	22.20 (0.87")	* SCC048F-029-TH-BB <i>Screws - Captive - Thumb - Brass - Black Oxide</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts



# Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material	Shank Length (A) mm	Part Number
<b>1/4-20 UNC (6.35mm) Thread Size</b>				
28.60 (1.13")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	22.20 (0.87")	* SCC064C-029-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
31.80 (1.25")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	25.40 (1.00")	* SCC064C-032-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
34.90 (1.38")	9.50 (0.37")	Half-Hard Brass / Nickel Plated	25.40 (1.00")	* SCC064C-035-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
38.10 (1.50")	9.50 (0.37")	Half-Hard Brass / Nickel Plated	28.60 (1.13")	* SCC064C-038-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>



Stocked or Short Delivery



Usually Available Short Delivery



Long delivery or not in current production

\* Large Minimum Quantities

\*\* Available only while stock lasts

# NOTES



## Distributed By

Miniature Bearings Australia  
<http://www.minibearings.com.au>  
[sales@minibearings.com.au](mailto:sales@minibearings.com.au)

Resellers: Please place your contact sticker over our details

## Avoid verbal communication

We sell an extensive range of products with varying amounts of technical data. Please assist us to provide you with accurate information by placing your orders and enquiries online or by e-mail.

# Thumbs Screws & Nuts