

MBA

2022.1

Thumbs Screws & Nuts



INDEX

Thumb Nuts	3-4
Thumb Screws	5-21
Captive Thumb Screws	22-25

This listing is intended as a quick guide to the sizes and styles available.


For more details on any item please enter the part number into the search box on our website.

To find and order parts online, simply enter the part number from this catalogue into the search box on any web page.

Thumb Nuts



Thumb Screws
Standard Example

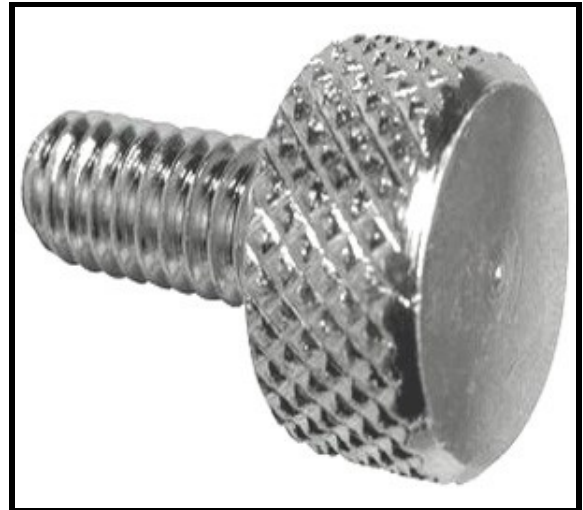


Captive Thumbs Screws




Thumb Nuts

Overall Length (C) mm (in.)	Head Width (B) mm (in.)	Head Diameter (A) mm (in.)	Shoulder Diameter mm	Material	Part Number
2-56 UNC (2.184mm) Thread Size					
6.40 (0.25")	3.18 (0.13")	6.35		Stainless Steel	* NT022C-THC-S3 <i>Nuts - Thumb - Collared - Stainless.</i>
4-40 UNC (2.845mm) Thread Size					
6.40 (0.25")	3.18 (0.13")	7.94		Stainless Steel	* NT028C-THC-S3 <i>Nuts - Thumb - Collared - Stainless.</i>
9.50 (0.37")	3.18 (0.13")	12.70	6.35 (0.25")	Stainless Steel	NT028C-TH1206-S3 <i>Nuts - Thumb - Basic</i>
M3x0.5 (3mm Standard) Thread Size					
7.50 (0.30")	2.50 (0.10")	12.00	6.00 (0.24")	303 Stainless Steel	* NT030M-TH1205-S3 <i>Nuts - Thumb - Basic</i>
6-32 UNC (3.5mm) Thread Size					
7.10 (0.28")	3.18 (0.13")	9.53		Brass	NT035C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
7.10 (0.28")	3.18 (0.13")	9.53		Stainless Steel	* NT035C-THC-S3 <i>Nuts - Thumb - Collared - Stainless.</i>
9.50 (0.37")	3.18 (0.13")	12.70	6.35 (0.25")	Stainless Steel	NT035C-TH1206-S3 <i>Nuts - Thumb - Basic</i>
15.90 (0.63")	3.18 (0.13")	19.05	6.35 (0.25")	Stainless Steel	NT035C-TH1912-S3 <i>Nuts - Thumb - Basic</i>
M4x0.7 (4mm Standard) Thread Size					
12.50 (0.49")	6.54 (0.26")	16.00	8.00 (0.31")	303 Stainless Steel	* NT040M-TH1606-S3 <i>Nuts - Thumb - Basic</i>
8-32 UNC (4.166mm) Thread Size					
7.10 (0.28")	3.18 (0.13")	11.11		Brass	* NT042C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
7.10 (0.28")	3.18 (0.13")	11.11		Stainless Steel	* NT042C-THC-S3 <i>Nuts - Thumb - Collared - Stainless.</i>
9.50 (0.37")	3.18 (0.13")	12.70	7.94 (0.31")	Stainless Steel	NT042C-TH1206-S3 <i>Nuts - Thumb - Basic</i>
9.50 (0.37")	3.18 (0.13")	19.05	7.94 (0.31")	Stainless Steel	NT042C-TH1906-S3 <i>Nuts - Thumb - Basic</i>
15.90 (0.63")	3.18 (0.13")	19.05	7.94 (0.31")	Stainless Steel	NT042C-TH1912-S3 <i>Nuts - Thumb - Basic</i>
10-24 UNC (4.762mm) Thread Size					
8.70 (0.34")	3.97 (0.16")	12.70		Brass	* NT048C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
8.70 (0.34")	3.97 (0.16")	12.70		Stainless Steel	* NT048C-THC-S3 <i>Nuts - Thumb - Collared - Stainless.</i>
11.10 (0.44")	4.76 (0.19")	12.70	9.53 (0.38")	Stainless Steel	NT048C-TH1206-S3 <i>Nuts - Thumb - Basic</i>
11.10 (0.44")	4.76 (0.19")	25.40	9.53 (0.38")	Stainless Steel	NT048C-TH2506-S3 <i>Nuts - Thumb - Basic</i>
10-32 UNF (4.762mm) Thread Size					
8.70 (0.34")	3.97 (0.16")	12.70		Brass	* NT048F-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
8.70 (0.34")	3.97 (0.16")	12.70		Stainless Steel	* NT048F-THC-S3 <i>Nuts - Thumb - Collared - Stainless.</i>
11.10 (0.44")	4.76 (0.19")	12.70	9.53 (0.38")	Stainless Steel	NT048F-TH1206-S3 <i>Nuts - Thumb - Basic</i>
11.10 (0.44")	4.76 (0.19")	25.40	9.53 (0.38")	Stainless Steel	NT048F-TH2506-S3 <i>Nuts - Thumb - Basic</i>
M5x0.8 (5mm Standard) Thread Size					
11.50 (0.45")	4.00 (0.16")	20.00	10.00 (0.39")	303 Stainless Steel	** NT050M-TH2007-S3 <i>Nuts - Thumb - Basic</i>

 Stocked or Short Delivery

 Usually Available Short Delivery

 Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Nuts

Overall Length (C) mm (in.)	Head Width (B) mm (in.)	Head Diameter (A) mm (in.)	Shoulder Diameter mm	Material	Part Number
M6x1 (6mm Standard) Thread Size					
15.00 (0.59")	5.00 (0.20")	24.00	12.00 (0.47")	303 Stainless Steel	* NT060M-TH2410-S3 <i>Nuts - Thumb - Basic</i>
1/4-20 UNC (6.35mm) Thread Size					
9.50 (0.37")	3.97 (0.16")	14.29		Brass	NT064C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
9.50 (0.37")	3.97 (0.16")	14.29		Stainless Steel	* NT064C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
12.70 (0.50")	6.35 (0.25")	25.40	12.70 (0.50")	Stainless Steel	NT064C-TH2506-S3 <i>Nuts - Thumb - Basic</i>
12.70 (0.50")	6.35 (0.25")	19.05	12.70 (0.50")	Stainless Steel	NT064C-TH1906-S3 <i>Nuts - Thumb - Basic</i>
19.10 (0.75")	6.35 (0.25")	25.40	12.70 (0.50")	Stainless Steel	NT064C-TH2512-S3 <i>Nuts - Thumb - Basic</i>
25.40 (1.00")	6.35 (0.25")	25.40	12.70 (0.50")	Stainless Steel	NT064C-TH2519-S3 <i>Nuts - Thumb - Basic</i>
5/16-18 UNC (7.938mm) Thread Size					
10.30 (0.41")	4.76 (0.19")	15.88		Brass	NT079C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
10.30 (0.41")	4.76 (0.19")	15.88		Stainless Steel	* NT079C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
3/8-16 UNC (9.525mm) Thread Size					
11.90 (0.47")	5.56 (0.22")	19.05		Brass	* NT095C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
11.90 (0.47")	5.56 (0.22")	19.05		Stainless Steel	* NT095C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
4-40 UNC (2.845mm) Thread Size					
6.35 (0.25")	13.49 (0.53")	Nylon	7.94 (0.31")		* THS028C-006-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
7.94 (0.31")	12.70 (0.50")	Aluminium	7.94 (0.31")	Plain	* THS028C-008-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
7.94 (0.31")	12.70 (0.50")	Brass	7.94 (0.31")	Zinc Chromate Plated	* THS028C-008-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
7.94 (0.31")	12.70 (0.50")	Stainless Steel	7.94 (0.31")	Plain	* THS028C-008-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
7.94 (0.31")	15.88 (0.63")	Brass	9.53 (0.38")	Zinc, Clear Chrome Plated	* THS028C-008-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
7.94 (0.31")	15.88 (0.63")	Stainless Steel	9.53 (0.38")	Plain	* THS028C-008-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
7.94 (0.31")	15.88 (0.63")	Steel	9.53 (0.38")	Zinc Coated	* THS028C-008-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
9.53 (0.38")	14.29 (0.56")	Brass	7.94 (0.31")	Zinc Chromate Plated	* THS028C-010-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	7.94 (0.31")	Plain	THS028C-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	7.94 (0.31")	Zinc Coated	* THS028C-010-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	16.66 (0.66")	Nylon	7.94 (0.31")		* THS028C-010-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	9.53 (0.38")	Plain	* THS028C-010-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
11.11 (0.44")	19.05 (0.75")	Stainless Steel	9.53 (0.38")	Plain	* THS028C-011-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
11.11 (0.44")	19.05 (0.75")	Steel	9.53 (0.38")	Zinc Coated	* THS028C-011-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	17.46 (0.69")	Brass	7.94 (0.31")	Zinc Chromate Plated	** THS028C-013-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	7.94 (0.31")	Plain	* THS028C-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	7.94 (0.31")	Zinc Coated	* THS028C-013-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	19.84 (0.78")	Nylon	7.94 (0.31")		** THS028C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	26.19 (1.03")	Nylon	7.94 (0.31")		** THS028C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	34.93 (1.38")	303 Stainless Steel	4.76 (0.19")		THS028C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
M3x0.5 (3mm Standard) Thread Size					
6.00 (0.24")	10.50 (0.41")	Stainless Steel	12.00 (0.47")	Plain	** THS030M-006-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
8.00 (0.31")	13.00 (0.51")	Stainless Steel	8.00 (0.31")	Plain	* THS030M-008L-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
8.00 (0.31")	12.50 (0.49")	Stainless Steel	12.00 (0.47")	Plain	* THS030M-008-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
10.00 (0.39")	14.50 (0.57")	Stainless Steel	12.00 (0.47")	Plain	** THS030M-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
11.00 (0.43")	16.00 (0.63")	Stainless Steel	8.00 (0.31")	Plain	* THS030M-011-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	8.00 (0.31")	Plain	* THS030M-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	18.50 (0.73")	Stainless Steel	12.00 (0.47")	Plain	* THS030M-014-K-3 <i>Screws - Thumb - Knurled - Stainless</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws

Thread Length (T) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
M3.5x0.6 (3.5mm Standard) Thread Size					
8.00 (0.31")	13.00 (0.51")	Stainless Steel	8.00 (0.31")	Plain	* THS035M-008-K-3 <i>Screws - Thumb - Knurled - Stainles.</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	8.00 (0.31")	Plain	* THS035M-013-K-3 <i>Screws - Thumb - Knurled - Stainles.</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
6-32 UNC (3.5mm) Thread Size					
6.35 (0.25")	13.49 (0.53")	Nylon			* THS035C-006-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
7.94 (0.31")	12.70 (0.50")	Aluminium	7.94 (0.31")	Plain	* THS035C-008-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
7.94 (0.31")	12.70 (0.50")	Stainless Steel	7.94 (0.31")	Plain	* THS035C-008-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
7.94 (0.31")	12.70 (0.50")	Steel	7.94 (0.31")	Zinc Coated	* THS035C-008-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	12.70 (0.50")	Nylatron GS	9.53 (0.38")		THS035C-010-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	7.94 (0.31")	Plain	* THS035C-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	7.94 (0.31")	Zinc Coated	* THS035C-010-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	16.66 (0.66")	Nylon			* THS035C-010-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
9.53 (0.38")	17.46 (0.69")	Brass	9.53 (0.38")	Zinc, Clear Chrome Plated	* THS035C-010-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	9.53 (0.38")	Plain	* THS035C-010-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	17.46 (0.69")	Steel	9.53 (0.38")	Zinc Coated	* THS035C-010-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Black Oxide	* THS035C-010-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Nickel Plated	* THS035C-010-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Nickel Plated	* THS035C-010-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Black Oxide	* THS035C-010-KL-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		11.11 (0.44")	Nickel Plated	* THS035C-010-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
11.11 (0.44")	19.05 (0.75")	Aluminium	9.53 (0.38")	Plain	* THS035C-011-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
11.11 (0.44")	19.05 (0.75")	Stainless Steel	9.53 (0.38")	Plain	* THS035C-011-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
11.11 (0.44")	19.05 (0.75")	Steel	9.53 (0.38")	Zinc Coated	* THS035C-011-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
11.11 (0.44")	19.05 (0.75")	303 Stainless Steel	11.11 (0.44")		THS035C-019-K-3-SHL <i>Screws - Thumb - Shoulder</i>
11.11 (0.44")	25.40 (1.00")	303 Stainless Steel	6.35 (0.25")		THS035C-011-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
12.70 (0.50")	15.88 (0.63")	Nylatron GS	9.53 (0.38")		THS035C-013-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Brass	7.94 (0.31")	Zinc Chromate Plated	* THS035C-013-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	7.94 (0.31")	Plain	* THS035C-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	7.94 (0.31")	Zinc Coated	* THS035C-013-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	20.64 (0.81")	Aluminium	9.53 (0.38")	Plain	* THS035C-013-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
12.70 (0.50")	20.64 (0.81")	Stainless Steel	9.53 (0.38")	Plain	* THS035C-013-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
12.70 (0.50")	20.64 (0.81")	Steel	9.53 (0.38")	Zinc Coated	* THS035C-013-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
12.70 (0.50")	19.84 (0.78")	Nylon			* THS035C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	20.64 (0.81")		11.11 (0.44")	Nickel Plated	* THS035C-013-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		9.53 (0.38")	Nickel Plated	* THS035C-013-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		12.70 (0.50")	Black Oxide	* THS035C-013-KL-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		9.53 (0.38")	Black Oxide	* THS035C-013-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		12.70 (0.50")	Nickel Plated	* THS035C-013-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
14.29 (0.56")	22.23 (0.88")	303 Stainless Steel	11.11 (0.44")		THS035C-022-K-3-SHL <i>Screws - Thumb - Shoulder</i>
19.05 (0.75")	26.19 (1.03")	Nylon			** THS035C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	32.54 (1.28")	Nylon			** THS035C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	34.93 (1.38")	303 Stainless Steel	4.76 (0.19")		THS035C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
M4x0.7 (4mm Standard) Thread Size					
8.00 (0.31")	13.00 (0.51")	Steel	15.50 (0.61")	Zinc Plated	THS040M-008-K-Z <i>Screws - Thumb - Knurled - Steel</i>
8.00 (0.31")	13.50 (0.53")	Stainless Steel	16.00 (0.63")	Plain	** THS040M-008-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
9.00 (0.35")	14.00 (0.55")	Stainless Steel	10.00 (0.39")	Plain	* THS040M-009-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
10.00 (0.39")	15.50 (0.61")	Stainless Steel	16.00 (0.63")	Plain	* THS040M-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
11.00 (0.43")	16.00 (0.63")	Stainless Steel	10.00 (0.39")	Plain	* THS040M-011-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	10.00 (0.39")	Plain	* THS040M-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	19.00 (0.75")	Stainless Steel	10.00 (0.39")	Plain	* THS040M-014-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	19.50 (0.77")	Stainless Steel	16.00 (0.63")	Plain	* THS040M-014-KL-3 <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")	21.00 (0.83")	Stainless Steel	10.00 (0.39")	Plain	* THS040M-016-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
17.00 (0.67")	23.50 (0.93")	Stainless Steel	16.00 (0.63")	Plain	* THS040M-017-K-3 <i>Screws - Thumb - Knurled - Stainless</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
8-32 UNC (4.166mm) Thread Size					
7.94 (0.31")	15.88 (0.63")	303 Stainless Steel	11.11 (0.44")		THS042C-016-K-3-SHL <i>Screws - Thumb - Shoulder</i>
7.94 (0.31")	15.88 (0.63")	303 Stainless Steel	12.70 (0.50")		THS042C-016-KL-3-SHL <i>Screws - Thumb - Shoulder</i>
9.53 (0.38")	13.11 (0.52")	Nylon			* THS042C-010-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
9.53 (0.38")	14.29 (0.56")	Nylatron GS	9.53 (0.38")		THS042C-010-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	9.53 (0.38")	Plain	* THS042C-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	9.53 (0.38")	Zinc Coated	* THS042C-010-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	15.88 (0.63")	303 Stainless Steel	9.53 (0.38")		THS042C-010-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	11.11 (0.44")	Plain	THS042C-010-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	17.46 (0.69")	Steel	11.11 (0.44")	Zinc Coated	* THS042C-010-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
9.53 (0.38")	17.46 (0.69")	303 Stainless Steel	12.70 (0.50")		THS042C-017-KL-3-SHL <i>Screws - Thumb - Shoulder</i>
9.53 (0.38")	17.46 (0.69")	303 Stainless Steel	11.11 (0.44")		THS042C-017-K-3-SHL <i>Screws - Thumb - Shoulder</i>
10.30 (0.41")	18.26 (0.72")	Brass	11.11 (0.44")	Black Oxide	** THS042C-010-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Black Oxide	* THS042C-010-KL-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Nickel Plated	* THS042C-010-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Black Oxide	* THS042C-010-KS-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Nickel Plated	* THS042C-010-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		11.11 (0.44")	Nickel Plated	* THS042C-010-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
11.11 (0.44")	19.05 (0.75")	303 Stainless Steel	12.70 (0.50")		THS042C-019-K-3-SHL <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")		Carbon Steel		Zinc Plated	THS042C-013-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
12.70 (0.50")	16.28 (0.64")	Nylon			* THS042C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Brass	9.53 (0.38")	Zinc Chromate Plated	* THS042C-013-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Nylatron GS	9.53 (0.38")		THS042C-013-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	9.53 (0.38")	Plain	* THS042C-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	9.53 (0.38")	Zinc Coated	* THS042C-013-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	20.64 (0.81")	303 Stainless Steel	12.70 (0.50")		THS042C-021-KL-3-SHL <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")	20.64 (0.81")	303 Stainless Steel	11.11 (0.44")		THS042C-021-K-3-SHL <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")	20.64 (0.81")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	* THS042C-013-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")	Stainless Steel	11.11 (0.44")	Plain	* THS042C-013-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
12.70 (0.50")	20.64 (0.81")	Steel	11.11 (0.44")	Zinc Coated	* THS042C-013-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	22.23 (0.88")	303 Stainless Steel	4.76 (0.19")		THS042C-013-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
12.70 (0.50")	20.64 (0.81")		11.11 (0.44")	Nickel Plated	* THS042C-013-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		11.11 (0.44")	Black Oxide	* THS042C-013-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		9.53 (0.38")	Nickel Plated	* THS042C-013-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
15.88 (0.63")	20.64 (0.81")	Brass	9.53 (0.38")	Zinc Chromate Plated	* THS042C-016-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
15.88 (0.63")	20.64 (0.81")	Stainless Steel	9.53 (0.38")	Plain	* THS042C-016-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
15.88 (0.63")	20.64 (0.81")	Steel	9.53 (0.38")	Zinc Coated	* THS042C-016-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
15.88 (0.63")	23.81 (0.94")	Aluminium	11.11 (0.44")	Plain	* THS042C-016-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
15.88 (0.63")	23.81 (0.94")	Stainless Steel	11.11 (0.44")	Plain	* THS042C-016-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
15.88 (0.63")	23.81 (0.94")	Steel	11.11 (0.44")	Zinc Coated	* THS042C-016-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	12.70 (0.50")		THS042C-024-K-3-SHL <i>Screws - Thumb - Shoulder</i>
19.05 (0.75")		Carbon Steel		Zinc Plated	THS042C-019-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
19.05 (0.75")	22.63 (0.89")	Nylon			* THS042C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	9.53 (0.38")		THS042C-019-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
20.64 (0.81")	38.10 (1.50")	303 Stainless Steel	6.35 (0.25")		THS042C-021-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	34.93 (1.38")	303 Stainless Steel	4.76 (0.19")		THS042C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	28.98 (1.14")	Nylon			* THS042C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
10-24 UNC (4.762mm) Thread Size					
12.70 (0.50")	17.46 (0.69")	Nylatron GS	9.53 (0.38")		THS048C-013-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	25.40 (1.00")	303 Stainless Steel	6.35 (0.25")		THS048C-013-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
12.70 (0.50")	28.58 (1.13")	Malleable Iron	22.23 (0.88")	Tumbled	THS048C-013-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
12.70 (0.50")	16.28 (0.64")	Nylon			* THS048C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	22.63 (0.89")	Nylon			* THS048C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	12.70 (0.50")		THS048C-019-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	19.05 (0.75")		THS048C-019-KL-NY <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	34.93 (1.38")	Malleable Iron	22.23 (0.88")	Tumbled	THS048C-019-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")		Steel	19.05 (0.75")	Black Oxide	THS048C-019-K-CS-DP <i>Screws - Thumb - Dog Point</i>
25.40 (1.00")	38.10 (1.50")	Hardened Steel	#Error	Black Oxide	THS048C-025-Q-CH <i>Screws - Thumb - 1-4 Turr.</i>
25.40 (1.00")	38.10 (1.50")	Unhardened Steel	#Error	Black Oxide	THS048C-025-Q-CS <i>Screws - Thumb - 1-4 Turr.</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	6.35 (0.25")		THS048C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	41.28 (1.63")	Malleable Iron	22.23 (0.88")	Tumbled	THS048C-025-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	28.98 (1.14")	Nylon			* THS048C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
31.75 (1.25")		Steel	19.05 (0.75")	Black Oxide	THS048C-032-K-CS-DP <i>Screws - Thumb - Dog Point</i>
38.10 (1.50")	53.98 (2.13")	Malleable Iron	22.23 (0.88")	Tumbled	THS048C-038-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")		303 Stainless Steel	15.88 (0.63")		THS048C-038-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
38.10 (1.50")		12L14 Steel	15.88 (0.63")	Black Oxide	THS048C-038-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
44.45 (1.75")		Steel	19.05 (0.75")	Black Oxide	THS048C-044-K-CS-DP <i>Screws - Thumb - Dog Point</i>
50.80 (2.00")		12L14 Steel	15.88 (0.63")	Black Oxide	THS048C-051-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		303 Stainless Steel	15.88 (0.63")		THS048C-051-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
3/16-24 BSW (4.762mm) Thread Size					
12.70 (0.50")	31.80 (1.25")	Steel	13.70 (0.54")	Zinc Plated	THS048W-013-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	30.40 (1.20")	Steel	13.70 (0.54")	Zinc Plated	THS048W-019-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	44.50 (1.75")	Steel	13.70 (0.54")	Zinc Plated	THS048W-025-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Page 11 of 27

E&OE

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
10-32 UNF (4.762mm) Thread Size					
7.94 (0.31")	15.88 (0.63")	303 Stainless Steel	12.70 (0.50")		THS048F-016-K-3-SHL Screws - Thumb - Shoulder
9.53 (0.38")	14.29 (0.56")	Aluminium	11.11 (0.44")	Plain	* THS048F-010-K-AL Screws - Thumb - Knurled - Aluminium
9.53 (0.38")	14.29 (0.56")	Stainless Steel	11.11 (0.44")	Plain	* THS048F-010-K-3 Screws - Thumb - Knurled - Stainless
9.53 (0.38")	14.29 (0.56")	Steel	11.11 (0.44")	Zinc Coated	* THS048F-010-K-CZ Screws - Thumb - Knurled - Steel
9.53 (0.38")	17.46 (0.69")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	* THS048F-010-K-BZ-WF Screws - Thumb - Knurled - Washer Face - Brass
9.53 (0.38")	17.46 (0.69")	Stainless Steel	11.11 (0.44")	Plain	* THS048F-010-K-SS-WF Screws - Thumb - Knurled - Washer Face - Stainless Steel
9.53 (0.38")	17.46 (0.69")	Steel	11.11 (0.44")	Zinc Coated	* THS048F-010-K-CS-WF Screws - Thumb - Knurled - Washer Face - Steel
9.53 (0.38")	17.46 (0.69")	303 Stainless Steel	12.70 (0.50")		THS048F-017-K-3-SHL Screws - Thumb - Shoulder
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Nickel Plated	* THS048F-010-KS-BN-WF Screws - Thumb - Knurled - Washer Face - Brass
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Nickel Plated	* THS048F-010-KL-BN-WF Screws - Thumb - Knurled - Washer Face - Brass
10.30 (0.41")	18.26 (0.72")		11.11 (0.44")	Nickel Plated	* THS048F-010-K-BN-WF Screws - Thumb - Knurled - Washer Face - Brass
11.11 (0.44")	19.05 (0.75")	303 Stainless Steel	12.70 (0.50")		THS048F-019-K-3-SHL Screws - Thumb - Shoulder
12.70 (0.50")		Carbon Steel		Zinc Plated	THS048F-013-F-CZ-NT Screws - Thumb - Nylon Tip
12.70 (0.50")	16.28 (0.64")	Nylon			** THS048F-013-K-NY-WF Screws - Thumb - Knurled - Washer Face - Nylon
12.70 (0.50")	17.46 (0.69")	Aluminium	11.11 (0.44")	Plain	* THS048F-013-K-AL Screws - Thumb - Knurled - Aluminium
12.70 (0.50")	17.46 (0.69")	Brass	11.11 (0.44")	Zinc Chromate Plated	* THS048F-013-K-BZ Screws - Thumb - Knurled - Brass
12.70 (0.50")	17.46 (0.69")	Nylatron GS	9.53 (0.38")		THS048F-013-K-NY Screws - Thumb - Knurled - Nylon
12.70 (0.50")	17.46 (0.69")	Stainless Steel	11.11 (0.44")	Plain	* THS048F-013-K-3 Screws - Thumb - Knurled - Stainless
12.70 (0.50")	17.46 (0.69")	Steel	11.11 (0.44")	Zinc Coated	* THS048F-013-K-CZ Screws - Thumb - Knurled - Steel
12.70 (0.50")	20.64 (0.81")	303 Stainless Steel	12.70 (0.50")		THS048F-021-K-3-SHL Screws - Thumb - Shoulder
12.70 (0.50")	20.64 (0.81")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	* THS048F-013-K-BZ-WF Screws - Thumb - Knurled - Washer Face - Brass
12.70 (0.50")	20.64 (0.81")	Stainless Steel	11.11 (0.44")	Plain	* THS048F-013-K-SS-WF Screws - Thumb - Knurled - Washer Face - Stainless Steel
12.70 (0.50")	20.64 (0.81")	Steel	11.11 (0.44")	Zinc Coated	* THS048F-013-K-CS-WF Screws - Thumb - Knurled - Washer Face - Steel
12.70 (0.50")	25.40 (1.00")	303 Stainless Steel	6.35 (0.25")		THS048F-013-K-3-P Screws - Thumb - Knurled - Stainless - Precision Head
14.29 (0.56")	22.23 (0.88")	303 Stainless Steel	12.70 (0.50")		THS048F-022-K-3-SHL Screws - Thumb - Shoulder
15.88 (0.63")	20.64 (0.81")	Aluminium	11.11 (0.44")	Plain	* THS048F-016-K-AL Screws - Thumb - Knurled - Aluminium
15.88 (0.63")	20.64 (0.81")	Brass	11.11 (0.44")	Zinc Chromate Plated	* THS048F-016-K-BZ Screws - Thumb - Knurled - Brass
15.88 (0.63")	20.64 (0.81")	Stainless Steel	11.11 (0.44")	Plain	* THS048F-016-K-3 Screws - Thumb - Knurled - Stainless

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Page 12 of 27

E&OE

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
15.88 (0.63")	20.64 (0.81")	Steel	11.11 (0.44")	Zinc Coated	* THS048F-016-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
15.88 (0.63")	23.81 (0.94")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	* THS048F-016-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
15.88 (0.63")	23.81 (0.94")	Stainless Steel	11.11 (0.44")	Plain	* THS048F-016-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
15.88 (0.63")	23.81 (0.94")	Steel	11.11 (0.44")	Zinc Coated	* THS048F-016-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	12.70 (0.50")		THS048F-016-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	12.70 (0.50")		THS048F-024-K-3-SHL <i>Screws - Thumb - Shoulder</i>
19.05 (0.75")		Carbon Steel		Zinc Plated	THS048F-019-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
19.05 (0.75")	22.63 (0.89")	Nylon			* THS048F-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	12.70 (0.50")		THS048F-019-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	19.05 (0.75")		THS048F-019-KL-NY <i>Screws - Thumb - Knurled - Nylon</i>
22.23 (0.88")	42.86 (1.69")	Steel	#Error	Black Oxide	THS048F-022-H-CB <i>Screws - Thumb - Half Turret</i>
25.40 (1.00")		Carbon Steel		Zinc Plated	THS048F-025-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
25.40 (1.00")	30.16 (1.19")	Nylatron GS	19.05 (0.75")		THS048F-025-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	19.05 (0.75")		THS048F-025-KL-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	12.70 (0.50")		THS048F-025-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	38.10 (1.50")	Hardened Steel	#Error	Black Oxide	THS048F-025-Q-CH <i>Screws - Thumb - 1-4 Turret</i>
25.40 (1.00")	38.10 (1.50")	Unhardened Steel	#Error	Black Oxide	THS048F-025-Q-CS <i>Screws - Thumb - 1-4 Turret</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	#Error		THS048F-025-Q-3 <i>Screws - Thumb - 1-4 Turret</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	6.35 (0.25")		THS048F-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	28.98 (1.14")	Nylon			* THS048F-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	50.80 (2.00")	Hardened Steel	#Error	Black Oxide	THS048F-038-Q-CH <i>Screws - Thumb - 1-4 Turret</i>
38.10 (1.50")	50.80 (2.00")	303 Stainless Steel	#Error		THS048F-038-Q-3 <i>Screws - Thumb - 1-4 Turret</i>
38.10 (1.50")	50.80 (2.00")	Unhardened Steel	#Error	Black Oxide	THS048F-038-Q-CS <i>Screws - Thumb - 1-4 Turret</i>
38.10 (1.50")		12L14 Steel	15.88 (0.63")	Black Oxide	THS048F-038-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
38.10 (1.50")		303 Stainless Steel	15.88 (0.63")		THS048F-038-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		12L14 Steel	15.88 (0.63")	Black Oxide	THS048F-051-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		303 Stainless Steel	15.88 (0.63")		THS048F-051-K-CS-FT <i>Screws - Thumb - Flat Tip</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws

Thread Length (TI) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
M5x0.8 (5mm Standard) Thread Size					
9.00 (0.35")	14.00 (0.55")	Stainless Steel	11.00 (0.43")	Plain	THS050M-009-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
10.00 (0.39")	16.00 (0.63")	Stainless Steel	20.00 (0.79")	Plain	* THS050M-010-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
11.00 (0.43")	16.00 (0.63")	Stainless Steel	11.00 (0.43")	Plain	* THS050M-011-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
12.00 (0.47")	23.70 (0.93")	Steel	13.70 (0.54")	Zinc Plated	THS050M-012-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	11.00 (0.43")	Plain	* THS050M-013-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
14.00 (0.55")	20.00 (0.79")	Stainless Steel	20.00 (0.79")	Plain	* THS050M-014-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
16.00 (0.63")	21.00 (0.83")	Stainless Steel	11.00 (0.43")	Plain	* THS050M-016-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
16.00 (0.63")	27.70 (1.09")	Steel	13.70 (0.54")	Zinc Plated	THS050M-016-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
17.00 (0.67")	24.00 (0.94")	Stainless Steel	20.00 (0.79")	Plain	* THS050M-017-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
20.00 (0.79")	31.70 (1.25")	Steel	13.70 (0.54")	Zinc Plated	THS050M-020-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
22.00 (0.87")	29.00 (1.14")	Stainless Steel	20.00 (0.79")	Plain	* THS050M-022-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
25.00 (0.98")	36.70 (1.44")	Steel	13.70 (0.54")	Zinc Plated	THS050M-025-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
27.00 (1.06")	34.00 (1.34")	Stainless Steel	20.00 (0.79")	Plain	* THS050M-027-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
M6x1 (6mm Standard) Thread Size					
12.00 (0.47")		Steel		Zinc Plated	THS060M-012-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
13.00 (0.51")	19.00 (0.75")	Stainless Steel	13.00 (0.51")	Plain	THS060M-013-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
14.00 (0.55")	21.00 (0.83")	Stainless Steel	13.00 (0.51")	Plain	* THS060M-014-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
14.00 (0.55")	21.00 (0.83")	Stainless Steel	24.00 (0.94")	Plain	* THS060M-014-KL-3 <i>Screws - Thumb - Knurled - Stainless.</i>
16.00 (0.63")		Steel		Zinc Plated	THS060M-016-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
16.00 (0.63")	22.00 (0.87")	Stainless Steel	13.00 (0.51")	Plain	* THS060M-016-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
16.00 (0.63")	25.00 (0.98")	Stainless Steel	24.00 (0.94")	Plain	* THS060M-016-KL-3 <i>Screws - Thumb - Knurled - Stainless.</i>
18.00 (0.71")	24.00 (0.94")	Stainless Steel	13.00 (0.51")	Plain	* THS060M-018-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
19.00 (0.75")	25.00 (0.98")	Stainless Steel	13.00 (0.51")	Plain	* THS060M-019-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
20.00 (0.79")		Steel		Zinc Plated	THS060M-020-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
21.00 (0.83")	30.00 (1.18")	Stainless Steel	24.00 (0.94")	Plain	* THS060M-021-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
25.00 (0.98")		Steel		Zinc Plated	THS060M-025-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
26.00 (1.02")	35.00 (1.38")	Stainless Steel	24.00 (0.94")	Plain	* THS060M-026-K-3 <i>Screws - Thumb - Knurled - Stainless.</i>
40.00 (1.57")		Steel		Zinc Plated	THS060M-040-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
1/4-20 UNC (6.35mm) Thread Size					
9.53 (0.38")	19.05 (0.75")	Aluminium	12.70 (0.50")	Plain	* THS064C-010-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
9.53 (0.38")	19.05 (0.75")	Stainless Steel	12.70 (0.50")	Plain	* THS064C-010-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	19.05 (0.75")	Steel	12.70 (0.50")	Zinc Coated	* THS064C-010-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")		Carbon Steel		Zinc Plated	THS064C-013-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
12.70 (0.50")	16.66 (0.66")	Nylon			* THS064C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	19.05 (0.75")	Aluminium	12.70 (0.50")	Plain	* THS064C-013-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
12.70 (0.50")	19.05 (0.75")	Brass	12.70 (0.50")	Zinc Chromate Plated	* THS064C-013-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	19.05 (0.75")	Stainless Steel	12.70 (0.50")	Plain	* THS064C-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	19.05 (0.75")	Steel	12.70 (0.50")	Zinc Coated	* THS064C-013-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	22.23 (0.88")	Aluminium	12.70 (0.50")	Plain	* THS064C-013-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
12.70 (0.50")	22.23 (0.88")	Brass	12.70 (0.50")	Zinc, Clear Chrome Plated	* THS064C-013-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	22.23 (0.88")	Stainless Steel	12.70 (0.50")	Plain	* THS064C-013-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
12.70 (0.50")	22.23 (0.88")	Steel	12.70 (0.50")	Zinc Coated	* THS064C-013-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	25.40 (1.00")	303 Stainless Steel	7.94 (0.31")		THS064C-013-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
12.70 (0.50")	28.58 (1.13")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-013-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
12.70 (0.50")	28.58 (1.13")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-013-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
12.70 (0.50")	33.34 (1.31")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-013-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
15.88 (0.63")	22.23 (0.88")	Stainless Steel	12.70 (0.50")	Plain	* THS064C-016-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
15.88 (0.63")	22.23 (0.88")	Steel	12.70 (0.50")	Zinc Coated	* THS064C-016-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	25.40 (1.00")		THS064C-016-KL-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	19.05 (0.75")		THS064C-016-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
15.88 (0.63")	25.40 (1.00")	Brass	12.70 (0.50")	Zinc, Clear Chrome Plated	* THS064C-016-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
15.88 (0.63")	25.40 (1.00")	Stainless Steel	12.70 (0.50")	Plain	* THS064C-016-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
15.88 (0.63")	25.40 (1.00")	Steel	12.70 (0.50")	Zinc Coated	* THS064C-016-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
19.05 (0.75")	23.01 (0.91")	Nylon			* THS064C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	19.05 (0.75")		THS064C-019-KL-NY <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	12.70 (0.50")		THS064C-019-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	25.40 (1.00")	Aluminium	12.70 (0.50")	Plain	* THS064C-019-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
19.05 (0.75")	25.40 (1.00")	Brass	12.70 (0.50")	Zinc Chromate Plated	* THS064C-019-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
19.05 (0.75")	25.40 (1.00")	Stainless Steel	12.70 (0.50")	Plain	* THS064C-019-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
19.05 (0.75")	25.40 (1.00")	Steel	12.70 (0.50")	Zinc Coated	* THS064C-019-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
19.05 (0.75")	28.58 (1.13")	Aluminium	12.70 (0.50")	Plain	* THS064C-019-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
19.05 (0.75")	28.58 (1.13")	Brass	12.70 (0.50")	Zinc, Clear Chrome Plated	* THS064C-019-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
19.05 (0.75")	28.58 (1.13")	Stainless Steel	12.70 (0.50")	Plain	THS064C-019-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
19.05 (0.75")	28.58 (1.13")	Steel	12.70 (0.50")	Zinc Coated	* THS064C-019-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
19.05 (0.75")	34.93 (1.38")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-019-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	34.93 (1.38")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-019-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
19.05 (0.75")	39.69 (1.56")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-019-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
25.40 (1.00")	29.36 (1.16")	Nylon			* THS064C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	30.16 (1.19")	Nylatron GS	19.05 (0.75")		THS064C-025-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	25.40 (1.00")		THS064C-025-KL-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	19.05 (0.75")		THS064C-025-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	7.94 (0.31")		THS064C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	41.28 (1.63")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-025-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	41.28 (1.63")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-025-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")	46.04 (1.81")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-025-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
25.40 (1.00")	50.80 (2.00")	Steel	#Error	Black Oxide	THS064C-025-H-CB <i>Screws - Thumb - Half Turret</i>
31.75 (1.25")	47.63 (1.88")	Hardened Steel	#Error	Black Oxide	THS064C-032-Q-CH <i>Screws - Thumb - 1-4 Turret</i>
31.75 (1.25")	47.63 (1.88")	303 Stainless Steel	#Error		THS064C-032-Q-3 <i>Screws - Thumb - 1-4 Turret</i>
31.75 (1.25")	47.63 (1.88")	Unhardened Steel	#Error	Black Oxide	THS064C-032-Q-CS <i>Screws - Thumb - 1-4 Turret</i>
31.75 (1.25")	47.63 (1.88")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-032-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
31.75 (1.25")		Steel	645.16 (25.40")	Black Oxide	THS064C-032-K-CS-DP <i>Screws - Thumb - Dog Point</i>
38.10 (1.50")	53.98 (2.13")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-038-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	53.98 (2.13")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-038-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
38.10 (1.50")	58.74 (2.31")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-038-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
38.10 (1.50")		303 Stainless Steel	17.46 (0.69")		THS064C-038-K-CS-FT <i>Screws - Thumb - Flat Tip</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
38.10 (1.50")		12L14 Steel	17.46 (0.69")	Black Oxide	THS064C-038-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
44.45 (1.75")	60.33 (2.38")	Unhardened Steel	#Error	Black Oxide	THS064C-044-Q-CS <i>Screws - Thumb - 1-4 Turr.</i>
44.45 (1.75")	60.33 (2.38")	303 Stainless Steel	#Error		THS064C-044-Q-3 <i>Screws - Thumb - 1-4 Turr.</i>
44.45 (1.75")	60.33 (2.38")	Hardened Steel	#Error	Black Oxide	THS064C-044-Q-CH <i>Screws - Thumb - 1-4 Turr.</i>
44.45 (1.75")		Steel	645.16 (25.40")	Black Oxide	THS064C-044-K-CS-DP <i>Screws - Thumb - Dog Poin.</i>
50.80 (2.00")	66.68 (2.63")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-051-F-MI <i>Screws - Thumb - Flat Key Head - Stee</i>
50.80 (2.00")	66.68 (2.63")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-051-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Stee</i>
50.80 (2.00")	71.44 (2.81")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-051-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Stee</i>
50.80 (2.00")		Nylon			** THS064C-051-F-NY <i>Screws - Thumb - Flat Key Head - Nylon</i>
57.15 (2.25")		Steel	645.16 (25.40")	Black Oxide	THS064C-057-K-CS-DP <i>Screws - Thumb - Dog Poin.</i>
63.50 (2.50")		12L14 Steel	17.46 (0.69")	Black Oxide	THS064C-064-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
63.50 (2.50")		303 Stainless Steel	17.46 (0.69")		THS064C-064-K-CS-FT <i>Screws - Thumb - Flat Tip</i>

1/4-20 BSW (6.35mm) Thread Size

12.70 (0.50")		Steel		Zinc Plated	THS064W-013-F-CS <i>Screws - Thumb - Flat Key Head - Stee</i>
19.10 (0.75")		Steel		Zinc Plated	THS064W-019-F-CS <i>Screws - Thumb - Flat Key Head - Stee</i>
25.40 (1.00")		Steel		Zinc Plated	THS064W-025-F-CS <i>Screws - Thumb - Flat Key Head - Stee</i>
31.80 (1.25")		Steel		Zinc Plated	THS064W-032-F-CS <i>Screws - Thumb - Flat Key Head - Stee</i>
38.10 (1.50")		Steel		Zinc Plated	THS064W-038-F-CS <i>Screws - Thumb - Flat Key Head - Stee</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Page 17 of 27

E&OE

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
5/16-18 UNC (7.938mm) Thread Size					
12.70 (0.50")	30.16 (1.19")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-013-FL-MI <i>Screws - Thumb - Flat Key Head - Stee</i>
12.70 (0.50")	31.75 (1.25")		44.45 (1.75")		* THS079C-013-W-CS <i>Screws - Thumb - Wing - Stee</i>
12.70 (0.50")	17.07 (0.67")	Nylon			* THS079C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylo</i>
19.05 (0.75")		Steel		Zinc Plated	THS079W-019-F-CS <i>Screws - Thumb - Flat Key Head - Stee</i>
19.05 (0.75")	36.51 (1.44")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-019-F-MI <i>Screws - Thumb - Flat Key Head - Stee</i>
19.05 (0.75")	38.10 (1.50")	Steel	44.45 (1.75")		THS079C-019-W-CS <i>Screws - Thumb - Wing - Stee</i>
19.05 (0.75")	39.69 (1.56")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-019-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Stee</i>
25.40 (1.00")		Steel		Zinc Plated	THS079W-025-F-CS <i>Screws - Thumb - Flat Key Head - Stee</i>
25.40 (1.00")	26.99 (1.06")	Steel	#Error	Black Oxide	THS079C-025-H-CB <i>Screws - Thumb - Half Turr</i>
25.40 (1.00")	42.86 (1.69")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-025-F-MI <i>Screws - Thumb - Flat Key Head - Stee</i>
25.40 (1.00")	44.45 (1.75")	Steel	44.45 (1.75")		THS079C-025-W-CS <i>Screws - Thumb - Wing - Stee</i>
25.40 (1.00")	29.77 (1.17")	Nylon			* THS079C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylo</i>
31.75 (1.25")	49.21 (1.94")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-032-F-MI <i>Screws - Thumb - Flat Key Head - Stee</i>
31.75 (1.25")		Steel	28.58 (1.13")	Black Oxide	THS079C-032-K-CS-DP <i>Screws - Thumb - Dog Poin</i>
31.80 (1.25")		Steel		Zinc Plated	THS079W-032-F-CS <i>Screws - Thumb - Flat Key Head - Stee</i>
38.10 (1.50")		Steel		Zinc Plated	THS079W-038-F-CS <i>Screws - Thumb - Flat Key Head - Stee</i>
38.10 (1.50")	42.47 (1.67")	Nylon			* THS079C-038-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylo</i>
38.10 (1.50")	55.56 (2.19")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-038-F-MI <i>Screws - Thumb - Flat Key Head - Stee</i>
38.10 (1.50")	57.15 (2.25")	Unhardened Steel	#Error	Black Oxide	THS079C-038-Q-CS <i>Screws - Thumb - 1-4 Turr.</i>
38.10 (1.50")	57.15 (2.25")	Hardened Steel	#Error	Black Oxide	THS079C-038-Q-CH <i>Screws - Thumb - 1-4 Turr.</i>
38.10 (1.50")	57.15 (2.25")	303 Stainless Steel	#Error		THS079C-038-Q-3 <i>Screws - Thumb - 1-4 Turr.</i>
38.10 (1.50")	57.15 (2.25")	Steel	44.45 (1.75")		THS079C-038-W-CS <i>Screws - Thumb - Wing - Stee</i>
38.10 (1.50")	58.74 (2.31")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-038-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Stee</i>
44.45 (1.75")		Steel	28.58 (1.13")	Black Oxide	THS079C-044-K-CS-DP <i>Screws - Thumb - Dog Poin</i>
44.45 (1.75")		12L14 Steel	19.05 (0.75")	Black Oxide	THS079C-044-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
44.45 (1.75")		303 Stainless Steel	19.05 (0.75")		THS079C-044-K-S3-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")	55.17 (2.17")	Nylon			** THS079C-051-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylo</i>
50.80 (2.00")	68.26 (2.69")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-051-F-MI <i>Screws - Thumb - Flat Key Head - Stee</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Page 18 of 27

E&OE

Thumb Screws

Thread Length (T) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
57.15 (2.25")		Steel	28.58 (1.13")	Black Oxide	THS079C-057-K-CS-DP <i>Screws - Thumb - Dog Poin.</i>
57.15 (2.25")		303 Stainless Steel	19.05 (0.75")		THS079C-057-K-S3-FT <i>Screws - Thumb - Flat Tip</i>
57.15 (2.25")		12L14 Steel	19.05 (0.75")	Black Oxide	THS079C-057-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
69.85 (2.75")	69.85 (2.75")	Hardened Steel	#Error	Black Oxide	THS079C-070-Q-CH <i>Screws - Thumb - 1-4 Turr.</i>
76.20 (3.00")		303 Stainless Steel	19.05 (0.75")		THS079C-076-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
76.20 (3.00")		12L14 Steel	19.05 (0.75")	Black Oxide	THS079C-076-K-CB-FT <i>Screws - Thumb - Flat Tip</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws

Thread Length (TI) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
3/8-16 UNC (9.525mm) Thread Size					
12.70 (0.50")	17.46 (0.69")	Nylon			** THS095C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	34.93 (1.38")	Malleable Iron	31.75 (1.25")	Tumbled	THS095C-013-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
19.05 (0.75")	38.10 (1.50")	Malleable Iron	26.99 (1.06")	Tumbled	THS095C-019-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	41.28 (1.63")	Steel	46.04 (1.81")		THS095C-019-W-CS <i>Screws - Thumb - Wing - Steel</i>
25.40 (1.00")	30.16 (1.19")	Nylon			** THS095C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	44.45 (1.75")	Malleable Iron	26.99 (1.06")	Tumbled	THS095C-025-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	47.63 (1.88")	Malleable Iron	31.75 (1.25")	Tumbled	THS095C-025-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")	47.63 (1.88")	Steel	46.04 (1.81")		THS095C-025-W-CS <i>Screws - Thumb - Wing - Steel</i>
25.40 (1.00")	50.80 (2.00")	Malleable Iron	36.51 (1.44")	Tumbled	THS095C-025-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
31.75 (1.25")	50.80 (2.00")	Malleable Iron	26.99 (1.06")	Tumbled	THS095C-032-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	42.86 (1.69")	Nylon			* THS095C-038-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	57.15 (2.25")	Malleable Iron	26.99 (1.06")	Tumbled	THS095C-038-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	60.33 (2.38")	Steel	46.04 (1.81")		THS095C-038-W-CS <i>Screws - Thumb - Wing - Steel</i>
38.10 (1.50")	63.50 (2.50")	Unhardened Steel	#Error	Black Oxide	THS095C-038-Q-CS <i>Screws - Thumb - 1-4 Turr.</i>
38.10 (1.50")	63.50 (2.50")	Hardened Steel	#Error	Black Oxide	THS095C-038-Q-CH <i>Screws - Thumb - 1-4 Turr.</i>
38.10 (1.50")	63.50 (2.50")	303 Stainless Steel	#Error		THS095C-038-Q-3 <i>Screws - Thumb - 1-4 Turr.</i>
38.10 (1.50")	68.26 (2.69")	Steel	#Error	Black Oxide	THS095C-038-H-CB <i>Screws - Thumb - Half Turr.</i>
44.45 (1.75")		Steel	31.75 (1.25")	Black Oxide	THS095C-044-K-CS-DP <i>Screws - Thumb - Dog Point</i>
50.80 (2.00")	73.03 (2.88")	Malleable Iron	31.75 (1.25")	Tumbled	THS095C-051-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
50.80 (2.00")	76.20 (3.00")	Unhardened Steel	#Error	Black Oxide	THS095C-051-Q-CS <i>Screws - Thumb - 1-4 Turr.</i>
50.80 (2.00")	76.20 (3.00")	Hardened Steel	#Error	Black Oxide	THS095C-051-Q-CH <i>Screws - Thumb - 1-4 Turr.</i>
50.80 (2.00")		12L14 Steel	22.23 (0.88")	Black Oxide	THS095C-051-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		303 Stainless Steel	22.23 (0.88")		THS095C-051-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")	55.56 (2.19")	Nylon			* THS095C-051-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
63.50 (2.50")		12L14 Steel	22.23 (0.88")	Black Oxide	THS095C-064-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
63.50 (2.50")		303 Stainless Steel	22.23 (0.88")		THS095C-064-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
69.85 (2.75")		Steel	31.75 (1.25")	Black Oxide	THS095C-070-K-CS-DP <i>Screws - Thumb - Dog Point</i>
76.20 (3.00")		303 Stainless Steel	22.23 (0.88")		THS095C-076-K-CS-FT <i>Screws - Thumb - Flat Tip</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
76.20 (3.00")		12L14 Steel	22.23 (0.88")	Black Oxide	THS095C-076-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
1/2-13 UNC (12.7mm) Thread Size					
19.05 (0.75")	47.63 (1.88")	Malleable Iron	36.51 (1.44")	Tumbled	THS127C-019-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")	49.21 (1.94")	Malleable Iron	33.34 (1.31")	Tumbled	THS127C-025-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	30.56 (1.20")	Nylon			* THS127C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
31.75 (1.25")	55.56 (2.19")	Malleable Iron	33.34 (1.31")	Tumbled	THS127C-032-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	43.33 (1.71")	Nylon			* THS127C-038-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	61.91 (2.44")	Malleable Iron	33.34 (1.31")	Tumbled	THS127C-038-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	69.85 (2.75")	Steel	#Error	Black Oxide	THS127C-038-H-CB <i>Screws - Thumb - Half Turr</i>
44.45 (1.75")	69.85 (2.75")	Hardened Steel	#Error	Black Oxide	THS127C-044-Q-CH <i>Screws - Thumb - 1-4 Turr.</i>
44.45 (1.75")	69.85 (2.75")	Unhardened Steel	#Error	Black Oxide	THS127C-044-Q-CS <i>Screws - Thumb - 1-4 Turr.</i>
50.80 (2.00")	55.96 (2.20")	Nylon			* THS127C-051-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
57.15 (2.25")	82.55 (3.25")	Hardened Steel	#Error	Black Oxide	THS127C-057-Q-CH <i>Screws - Thumb - 1-4 Turr.</i>
63.50 (2.50")	87.31 (3.44")	Malleable Iron	33.34 (1.31")	Tumbled	THS127C-064-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
69.85 (2.75")		Steel	31.75 (1.25")	Black Oxide	THS127C-070-K-CS-DP <i>Screws - Thumb - Dog Point</i>
76.20 (3.00")	100.01 (3.94")	Malleable Iron	33.34 (1.31")	Tumbled	* THS127C-076-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
76.20 (3.00")	101.60 (4.00")	Steel	57.15 (2.25")		THS127C-076-W-CS <i>Screws - Thumb - Wing - Steel</i>
76.20 (3.00")		12L14 Steel	25.40 (1.00")	Black Oxide	THS127C-076-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
76.20 (3.00")		303 Stainless Steel	25.40 (1.00")		THS127C-076-K-CS-FT <i>Screws - Thumb - Flat Tip</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material	Shank Length (A) mm	Part Number
4-40 UNC (2.845mm) Thread Size				
15.88 (0.63")	3.18 (0.13")	303 Stainless Steel	9.53 (0.38")	* SCC028C-010-016-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
17.46 (0.69")	3.18 (0.13")	303 Stainless Steel	9.53 (0.38")	* SCC028C-010-017-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
17.46 (0.69")	3.18 (0.13")	303 Stainless Steel	11.11 (0.44")	* SCC028C-011-017-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
19.05 (0.75")	3.18 (0.13")	303 Stainless Steel	11.11 (0.44")	* SCC028C-011-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
19.05 (0.75")	3.18 (0.13")	303 Stainless Steel	12.70 (0.50")	* SCC028C-013-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
20.64 (0.81")	3.18 (0.13")	303 Stainless Steel	14.29 (0.56")	* SCC028C-014-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
20.64 (0.81")	3.18 (0.13")	303 Stainless Steel	12.70 (0.50")	* SCC028C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
21.43 (0.84")	7.14 (0.28")	303 Stainless Steel	16.67 (0.66")	* SCC028C-017-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
22.23 (0.88")	3.18 (0.13")	303 Stainless Steel	14.29 (0.56")	* SCC028C-014-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
22.23 (0.88")	3.18 (0.13")	303 Stainless Steel	15.88 (0.63")	* SCC028C-016-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
23.02 (0.91")	7.14 (0.28")	303 Stainless Steel	18.26 (0.72")	* SCC028C-018-023-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
23.81 (0.94")	3.18 (0.13")	303 Stainless Steel	15.88 (0.63")	* SCC028C-016-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
23.81 (0.94")	3.18 (0.13")	303 Stainless Steel	17.46 (0.69")	* SCC028C-017-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
24.61 (0.97")	7.14 (0.28")	303 Stainless Steel	19.84 (0.78")	* SCC028C-020-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
25.40 (1.00")	3.18 (0.13")	303 Stainless Steel	19.05 (0.75")	* SCC028C-019-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
25.40 (1.00")	3.18 (0.13")	303 Stainless Steel	17.46 (0.69")	* SCC028C-017-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
26.19 (1.03")	7.14 (0.28")	303 Stainless Steel	21.43 (0.84")	* SCC028C-021-026-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
26.99 (1.06")	3.18 (0.13")	303 Stainless Steel	19.05 (0.75")	* SCC028C-019-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
26.99 (1.06")	3.18 (0.13")	303 Stainless Steel	20.64 (0.81")	* SCC028C-021-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
27.78 (1.09")	7.14 (0.28")	303 Stainless Steel	23.02 (0.91")	* SCC028C-023-028-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
28.58 (1.13")	3.18 (0.13")	303 Stainless Steel	22.23 (0.88")	* SCC028C-022-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
28.58 (1.13")	3.18 (0.13")	303 Stainless Steel	20.64 (0.81")	* SCC028C-021-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
30.16 (1.19")	3.18 (0.13")	303 Stainless Steel	23.81 (0.94")	* SCC028C-024-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
30.16 (1.19")	3.18 (0.13")	303 Stainless Steel	22.23 (0.88")	* SCC028C-022-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
31.75 (1.25")	3.18 (0.13")	303 Stainless Steel	25.40 (1.00")	* SCC028C-025-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
31.75 (1.25")	3.18 (0.13")	303 Stainless Steel	23.81 (0.94")	* SCC028C-024-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>
33.34 (1.31")	3.18 (0.13")	303 Stainless Steel	25.40 (1.00")	* SCC028C-025-033-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless Steel</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material	Shank Length (A) mm	Part Number
6-32 UNC (3.5mm) Thread Size				
19.05 (0.75")	5.56 (0.22")	303 Stainless Steel	11.11 (0.44")	SCC035C-011-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
20.64 (0.81")	5.56 (0.22")	303 Stainless Steel	12.70 (0.50")	SCC035C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
21.43 (0.84")	7.14 (0.28")	303 Stainless Steel	16.67 (0.66")	* SCC035C-017-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
21.43 (0.84")	7.14 (0.28")	303 Stainless Steel	16.67 (0.66")	* SCC035C-017-021B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
22.23 (0.88")	5.56 (0.22")	303 Stainless Steel	14.29 (0.56")	SCC035C-014-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
23.02 (0.91")	7.14 (0.28")	303 Stainless Steel	18.26 (0.72")	* SCC035C-018-023-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
23.02 (0.91")	7.14 (0.28")	303 Stainless Steel	18.26 (0.72")	* SCC035C-018-023B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
23.81 (0.94")	5.56 (0.22")	303 Stainless Steel	15.88 (0.63")	SCC035C-016-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
23.80 (0.94")	4.80 (0.19")	Half-Hard Brass / Black Oxide	19.10 (0.75")	* SCC035C-024-TH-BB <i>Screws - Captive - Thumb - Brass - Black Oxide</i>
23.80 (0.94")	4.80 (0.19")	Half-Hard Brass / Nickel Plated	19.10 (0.75")	* SCC035C-024-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plate</i>
24.61 (0.97")	7.14 (0.28")	303 Stainless Steel	19.84 (0.78")	* SCC035C-020-025B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
24.61 (0.97")	7.14 (0.28")	303 Stainless Steel	19.84 (0.78")	* SCC035C-020-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
25.40 (1.00")	5.56 (0.22")	303 Stainless Steel	17.46 (0.69")	SCC035C-017-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
26.19 (1.03")	7.14 (0.28")	303 Stainless Steel	21.43 (0.84")	* SCC035C-021-026-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
26.19 (1.03")	7.14 (0.28")	303 Stainless Steel	21.43 (0.84")	* SCC035C-021-026B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
26.99 (1.06")	5.56 (0.22")	303 Stainless Steel	19.05 (0.75")	SCC035C-019-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
27.78 (1.09")	7.14 (0.28")	303 Stainless Steel	23.02 (0.91")	* SCC035C-023-028B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
27.78 (1.09")	7.14 (0.28")	303 Stainless Steel	23.02 (0.91")	* SCC035C-023-028-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
28.58 (1.13")	5.56 (0.22")	303 Stainless Steel	20.64 (0.81")	SCC035C-021-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
30.16 (1.19")	5.56 (0.22")	303 Stainless Steel	22.23 (0.88")	SCC035C-022-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
31.75 (1.25")	5.56 (0.22")	303 Stainless Steel	23.81 (0.94")	SCC035C-024-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
33.34 (1.31")	5.56 (0.22")	303 Stainless Steel	25.40 (1.00")	SCC035C-025-033-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
34.93 (1.38")	5.56 (0.22")	303 Stainless Steel	26.99 (1.06")	SCC035C-027-035-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
36.51 (1.44")	5.56 (0.22")	303 Stainless Steel	28.58 (1.13")	SCC035C-029-037-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
38.10 (1.50")	5.56 (0.22")	303 Stainless Steel	30.16 (1.19")	SCC035C-030-038-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>
39.69 (1.56")	5.56 (0.22")	303 Stainless Steel	31.75 (1.25")	SCC035C-032-040-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless.</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material	Shank Length (A) mm	Part Number
8-32 UNC (4.166mm) Thread Size				
19.05 (0.75")	5.56 (0.22")	303 Stainless Steel	11.11 (0.44")	SCC042C-011-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
20.64 (0.81")	5.56 (0.22")	303 Stainless Steel	12.70 (0.50")	SCC042C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
22.23 (0.88")	5.56 (0.22")	303 Stainless Steel	14.29 (0.56")	SCC042C-014-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
23.81 (0.94")	5.56 (0.22")	303 Stainless Steel	15.88 (0.63")	SCC042C-016-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
25.40 (1.00")	5.56 (0.22")	303 Stainless Steel	17.46 (0.69")	SCC042C-017-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
25.40 (1.00")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	19.10 (0.75")	* SCC042C-025-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plate</i>
25.40 (1.00")	9.50 (0.37")	Half-Hard Brass / Black Oxide	19.10 (0.75")	* SCC042C-025-TH-BB <i>Screws - Captive - Thumb - Brass - Black Oxid</i>
26.99 (1.06")	5.56 (0.22")	303 Stainless Steel	19.05 (0.75")	SCC042C-019-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
28.60 (1.13")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	22.20 (0.87")	* SCC042C-029-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plate</i>
28.58 (1.13")	5.56 (0.22")	303 Stainless Steel	20.64 (0.81")	SCC042C-021-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
30.16 (1.19")	5.56 (0.22")	303 Stainless Steel	22.23 (0.88")	SCC042C-022-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
31.75 (1.25")	5.56 (0.22")	303 Stainless Steel	23.81 (0.94")	SCC042C-024-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
33.34 (1.31")	5.56 (0.22")	303 Stainless Steel	25.40 (1.00")	SCC042C-025-033-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
34.93 (1.38")	5.56 (0.22")	303 Stainless Steel	26.99 (1.06")	SCC042C-027-035-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
36.51 (1.44")	5.56 (0.22")	303 Stainless Steel	28.58 (1.13")	SCC042C-029-037-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
38.10 (1.50")	5.56 (0.22")	303 Stainless Steel	30.16 (1.19")	SCC042C-030-038-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
39.69 (1.56")	5.56 (0.22")	303 Stainless Steel	31.75 (1.25")	SCC042C-032-040-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
10-24 UNC (4.762mm) Thread Size				
20.64 (0.81")	6.35 (0.25")	303 Stainless Steel	12.70 (0.50")	* SCC048C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
25.40 (1.00")	6.35 (0.25")	303 Stainless Steel	14.29 (0.56")	* SCC048C-014-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
26.99 (1.06")	6.35 (0.25")	303 Stainless Steel	15.88 (0.63")	* SCC048C-016-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
28.58 (1.13")	6.35 (0.25")	303 Stainless Steel	17.46 (0.69")	* SCC048C-017-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
30.16 (1.19")	6.35 (0.25")	303 Stainless Steel	19.05 (0.75")	* SCC048C-019-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainles.</i>
10-32 UNF (4.762mm) Thread Size				
28.60 (1.13")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	22.20 (0.87")	* SCC048F-029-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plate</i>
28.60 (1.13")	9.50 (0.37")	Half-Hard Brass / Black Oxide	22.20 (0.87")	* SCC048F-029-TH-BB <i>Screws - Captive - Thumb - Brass - Black Oxid</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

Page 24 of 27

E&OE

Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material	Shank Length (A) mm	Part Number
1/4-20 UNC (6.35mm) Thread Size				
28.60 (1.13")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	22.20 (0.87")	* SCC064C-029-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plate</i>
31.80 (1.25")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	25.40 (1.00")	* SCC064C-032-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plate</i>
34.90 (1.38")	9.50 (0.37")	Half-Hard Brass / Nickel Plated	25.40 (1.00")	* SCC064C-035-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plate</i>
38.10 (1.50")	9.50 (0.37")	Half-Hard Brass / Nickel Plated	28.60 (1.13")	* SCC064C-038-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plate</i>

Stocked or Short Delivery

Usually Available Short Delivery

Long delivery or not in current production

* Large Minimum Quantities

** Available only while stock last:

NOTES



Distributed By

Miniature Bearings Australia
<http://www.minibearings.com.au>
sales@minibearings.com.au

Resellers: Please place your contact sticker over our details

Avoid verbal communication

We sell an extensive range of products with varying amounts of technical data. Please assist us to provide you with accurate information by placing your orders and enquiries online or by e-mail.

Thumbs Screws & Nuts